


# 175 SERIES ISO 7241 - A COUPLING – FEMALE


Agri NV | ZnNi Plated | Poppet Valve | Steel

STANDARD ISO 7241-1 series A

MATERIAL Steel

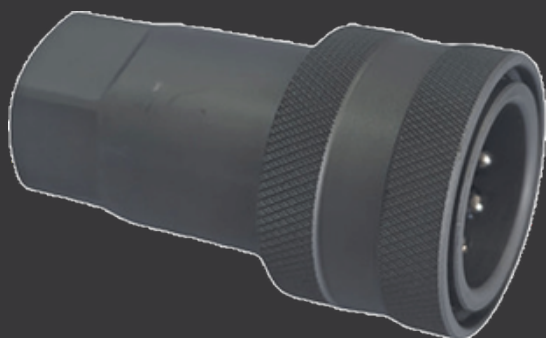

|                      |                                                                                                                       |
|----------------------|-----------------------------------------------------------------------------------------------------------------------|
| Standard:            | ISO 7241-1 series A                                                                                                   |
| Material:            | Steel                                                                                                                 |
| Surface Treatment:   | Zinc-Nickel (ZnNi) – MATE 1000                                                                                        |
| Valve Type:          | Poppet                                                                                                                |
| Seals:               | NBR (custom options available)                                                                                        |
| Working Temperature: | -25 °C to +125 °C                                                                                                     |
| Connection:          | Sleeve retraction                                                                                                     |
| Disconnection:       | Sleeve retraction                                                                                                     |
| Interchange:         | Faster agri, faster NV, faster ANV                                                                                    |
| Applications:        | Agricultural machinery Tractors and attachments Loaders and implements Industrial hydraulic circuits Mobile equipment |



| Part NO. Female | Body size | D mm | Ls mm | Hs mm | T          | Dash size | Max W.P Female (Bar) |
|-----------------|-----------|------|-------|-------|------------|-----------|----------------------|
| QAF175-04-MC    | 1/4"      | 25   | 47    | S19   | 1/4 BSPF   | -4        | 350                  |
| QAF175-06-MC    | 3/8"      | 31   | 57    | S22   | 3/8 BSPF   | -6        | 315                  |
| QAF175-08-MC    | 1/2"      | 38   | 66    | S27   | 1/2 BSPF   | -8        | 250                  |
| QAF175-12-MC    | 3/4"      | 48   | 82.5  | S34   | 3/4 BSPF   | -12       | 250                  |
| QAF175-16-MC    | 1"        | 54   | 97    | S41   | 1 BSPF     | -16       | 230                  |
| QAF175-20-MC    | 1.1/4"    | 70   | 117   | S50   | 1.1/4 BSPF | -20       | 230                  |

Note: Other seal materials and configurations available on request.