


297 SERIES ISO 16028 THREADED FLAT FACE COUPLING – FEMALE


VEP | Zinc-Nickel (ZnNi) – MATE 1000 | Flat Valve | Screw to connect | Steel

STANDARD ISO 16028

MATERIAL Steel

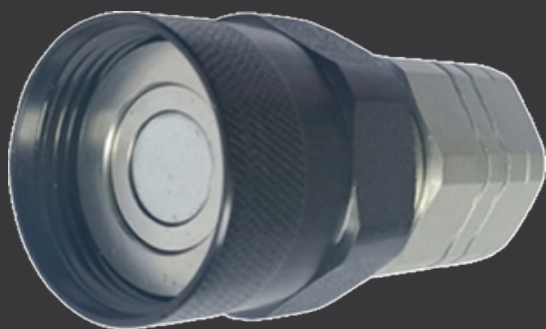

Standard:	ISO 16028
Material:	Steel
Surface Treatment:	Zinc-Nickel (ZnNi) – MATE 1000
Valve Type:	Flat
Seals:	NBR (custom options available)
Working Temperature:	-25 °C to +125 °C
Connection:	Screw to connect
Disconnection:	Unscrew to disconnect
Connection Under Pressure:	Allowed up to W.P
Interchange:	Stucchi VEP - P series Parker FET series Faster FHV series Holmbury HFT series DNP PST4 series Voswinkel FT series

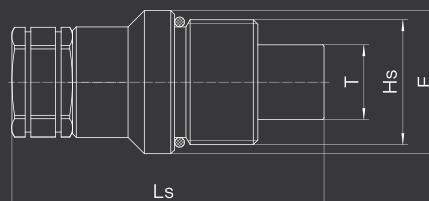

Part No. Female	Body Size	E mm	Hs mm	Hq mm	Ls mm	T	Dash Size	Max W.P Female (Bar)
QFSF297-0606-MC	3/8"	41.8	30	38	70	3/8 BSPF	-6	330
QFSF297-0608-MC	3/8"	41.8	30	38	71.5	1/2 BSPF	-6	330
QFSF297-0808-MC	1/2"	49.8	36	46	78	1/2 BSPF	-8	330
QFSF297-0812UNF-MC	1/2"	49.8	36	46	85	1.1/16 UNOF	-8	330
QFSF297-1216-MC	3/4"	58.8	46	55	99	1 BSPF	-12	330
QFSF297-1212UNF-MC	3/4"	58.8	46	55	99	1.1/16 UNOF	-12	330
QFSF297-1620-MC	1"	70	55	65	106	1.1/4 BSPF	-16	300
QFSF297-1616UNF-MC	1"	70	55	65	105	1.5/16 UNOF	-16	300