

297 SERIES ISO 16028 THREADED FLAT FACE COUPLING – MALE


VEP | Zinc-Nickel (ZnNi) – MATE 1000 | Flat Valve | Screw to connect | Steel

STANDARD ISO 16028

MATERIAL Steel



Standard:	ISO 16028
Material:	Steel
Surface Treatment:	Zinc-Nickel (ZnNi) – MATE 1000
Valve Type:	Flat
Seals:	NBR (custom options available)
Working Temperature:	-25 °C to +125 °C
Connection:	Screw to connect
Disconnection:	Unscrew to disconnect
Connection Under Pressure:	Allowed up to W.P
Interchange:	Stucchi VEP - P series Parker FET series Faster FHV series Holmbury HFT series DNP PST4 series Voswinkel FT series

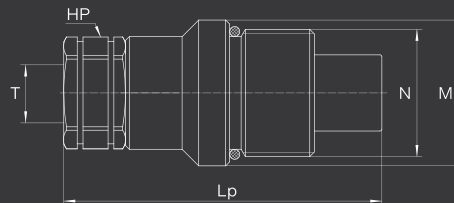

Part No. Male	Body Size	N	M mm	Hp mm	Lp mm	T	Dash Size	Max W.P Male (Bar)
QFSM297-0606-MC	3/8"	M33x2	37.8	27	82.5	3/8 BSPF	-6	550
QFSM297-0608-MC	3/8"	M33x2	37.8	27	86	1/2 BSPF	-6	550
QFSM297-0808-MC	1/2"	M40x3	45.8	36	97	1/2 BSPF	-8	550
QFSM297-0812UNF-MC	1/2"	M40x3	45.8	36	99	1.1/16 UNOF	-8	550
QFSM297-1212UNF-MC	3/4"	M50x3	54.8	46	114	1.1/16 UNOF	-12	500
QFSM297-1216-MC	3/4"	M50x3	54.8	46	114	1 BSPF	-12	500
QFSM297-1616UNF-MC	1"	M58x3	64.5	55	123.5	1.5/16 UNOF	-16	470
QFSM297-1620-MC	1"	M58x3	64.5	55	123.5	1.1/4 BSPF	-16	470