


BKH SERIES – TWO-WAY HIGH PRESSURE BALL VALVE**(Steel)**

Carbon Steel | Handle Operated | BSP Thread | Up to 500 Bar

WORKING PRESSURE up to 500 bar**MATERIAL** Steel

Material:	Steel
Seals:	NBR (custom options available)
Working Temperature:	-25 °C to +125 °C
Surface Treatment:	Zinc plated
Ball Seals:	POM / PEEK
Connection:	Handle
Disconnection:	Handle
Interchange:	Hydac KHB series Hydac KHM series Pister BKH series

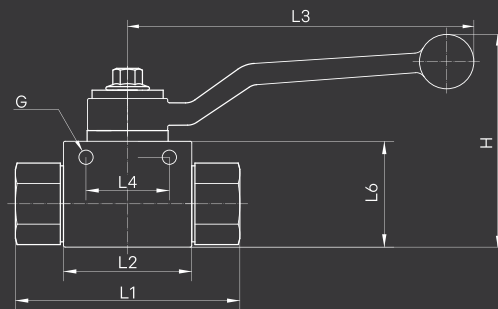

Part No.	Body Size	DN	L1 mm	L2 mm	L3 mm	H mm	G mm	L4 mm	L5 mm Width	L6 mm	T	Max Working Pressure (Bar)
BVB-MH-02	1/8"	4	69	40	154.1	73	4.5	26	26	33	1/8 BSPF	500
BVB-MH-04	1/4"	6	69	40	145	71	4.5	26	26	33	1/4 BSPF	500
BVB-MH-06	3/8"	10	71	42	145	76.5	6.5	32	33	38	3/8 BSPF	500
BVB-MH-08	1/2"	13	82	48	161	81	6.5	37.5	36	40	1/2 BSPF	500
BVB-MH-12	3/4"	20	96	62	218	112	6.5	49	49	57	3/4 BSPF	315

Series: LL = Very Light L = Light S = Heavy PN = Nominal pressure PB = Max. operating pressure Ø d2 = External pipe diameter Product Versions: Metric Male / NP Tapered Male (GE - NPT) VA - Screw-in fitting, Stainless steel | VN - Screw-in fitting, Steel