

BSP MALE / METRIC MALE POSITIONAL 90

Screw-in socket, angle 90°

SURFACE MotusCoat™

MATERIAL Steel



Connection 1: Metric External threads

Sealing form 1: Thread seal

Connection 2+3: BSP Nut Threads


Sealing form 2+3: 74° outer cone

Design: Screw-in sockets

Construction: L shaped

Material: Steel

Surface: MotusCoat™

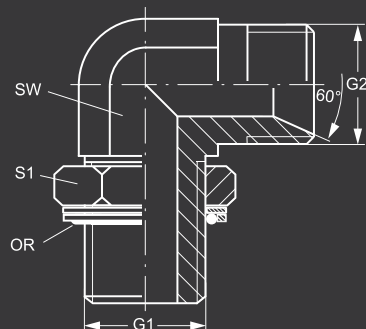

Identification	G1	G2	SW mm	S1	OR
MMP-BPM-90C-1002-MC	M 10 x 1	G 1/8"-28	11	15	8.00 x 1.50
MMP-BPM-90C-1202-MC	M 12 x 1.5	G 1/8"-28	14	18	9.30 x 2.40
MMP-BPM-90C-1204-MC	M 12 x 1.5	G 1/4"-19	14	18	9.30 x 2.40
MMP-BPM-90C-1404-MC	M 14 x 1.5	G 1/4"-19	14	20	11.30 x 2.40
MMP-BPM-90C-1406-MC	M 14 x 1.5	G 3/8"-19	14	20	11.30 x 2.40
MMP-BPM-90C-1604-MC	M 16 x 1.5	G 1/4"-19	19	20	13.30 x 2.40
MMP-BPM-90C-1606-MC	M 16 x 1.5	G 3/8"-19	19	20	13.30 x 2.40
MMP-BPM-90C-1806-MC	M 18 x 1.5	G 3/8"-19	19	25	15.30 x 2.40
MMP-BPM-90C-1808-MC	M 18 x 1.5	G 1/2"-14	19	25	15.30 x 2.40
MMP-BPM-90C-2008-MC	M 20 x 1.5	G 1/2"-14	27	28	17.30 x 2.40
MMP-BPM-90C-2208-MC	M 22 x 1.5	G 1/2"-14	27	28	19.30 x 2.40
MMP-BPM-90C-2210-MC	M 22 x 1.5	G 5/8"-14	27	28	19.30 x 2.40
MMP-BPM-90C-2212-MC	M 22 x 1.5	G 3/4"-14	27	28	19.30 x 2.40
MMP-BPM-90C-2612-MC	M 26 x 1.5	G 3/4"-14	30	33	23.50 x 2.60
MMP-BPM-90C-2712-MC	M 27 x 2	G 3/4"-14	30	33	23.47 x 2.95
MMP-BPM-90C-3316-MC	M 33 x 2	G 1"-11	36	42	29.74 x 2.95
MMP-BPM-90C-4220-MC	M 42 x 2	G 1.1/4"-11	41	50	38.00 x 3.00
MMP-BPM-90C-4824-MC	M 48 x 2	G 1.1/2"-11	50	56	44.00 x 3.00

SW, S1, S2 = Width across flats