

BSP MALE TEE / BSP MALE POSITIONAL RUN


Screw-in socket, L shaped

SURFACE MotusCoat™

MATERIAL Steel



Connection 1:	BSP external thread, cylindrical
Sealing form 1:	Thread socket with O-ring + spacer diaphragm ring
Connection 2 +3:	BSP cylindrical external threads
Sealing form 2 +3:	60° inner cone
Design:	Adjustable direction screw-in socket
Construction:	L shaped
Material:	Steel
Surface:	MotusCoat™

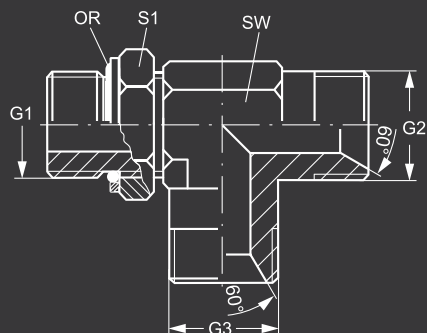

Identification	G1	G2 + G3	SW mm	S1	OR
BPP-BPM-BPM-020202-MC	G 1/8"-28	G 1/8"-28	11	16	7.65 x 1.78
BPP-BPM-BPM-040202-MC	G 1/4"-19	G 1/8"-28	14	20	10.78 x 2.62
BPP-BPM-BPM-040404-MC	G 1/4"-19	G 1/4"-19	14	20	10.78 x 2.62
BPP-BPM-BPM-040606-MC	G 1/4"-19	G 3/8"-19	19	20	10.78 x 2.62
BPP-BPM-BPM-060404-MC	G 3/8"-19	G 1/4"-19	19	24	13.94 x 2.62
BPP-BPM-BPM-060606-MC	G 3/8"-19	G 3/8"-19	19	24	13.94 x 2.62
BPP-BPM-BPM-060808-MC	G 3/8"-19	G 1/2"-14	22	24	13.94 x 2.62
BPP-BPM-BPM-080606-MC	G 1/2"-14	G 3/8"-19	22	28	17.86 x 2.62
BPP-BPM-BPM-080808-MC	G 1/2"-14	G 1/2"-14	22	28	17.86 x 2.62
BPP-BPM-BPM-081010-MC	G 1/2"-14	G 5/8"-14	22	28	17.86 x 2.62
BPP-BPM-BPM-081212-MC	G 1/2"-14	G 3/4"-14	27	28	17.86 x 2.62
BPP-BPM-BPM-120808-MC	G 3/4"-14	G 1/2"-14	27	35	23.47 x 2.62
BPP-BPM-BPM-121212-MC	G 3/4"-14	G 3/4"-14	27	35	23.47 x 2.62
BPP-BPM-BPM-121616-MC	G 3/4"-14	G 1"-11	33	35	23.47 x 2.62
BPP-BPM-BPM-161212-MC	G 1"-11	G 3/4"-14	33	43	29.74 x 3.53
BPP-BPM-BPM-161616-MC	G 1"-11	G 1"-11	33	45	29.74 x 3.53
BPP-BPM-BPM-201616-MC	G 1.1/4"-11	G 1"-11	41	52	37.69 x 3.53
BPP-BPM-BPM-202020-MC	G 1.1/4"-11	G 1.1/4"-11	41	52	37.69 x 3.53
BPP-BPM-BPM-242424-MC	G 1.1/2"-11	G 1.1/2"-11	48	58	44.04 x 3.53

SW, S1, S2 = Width across flats