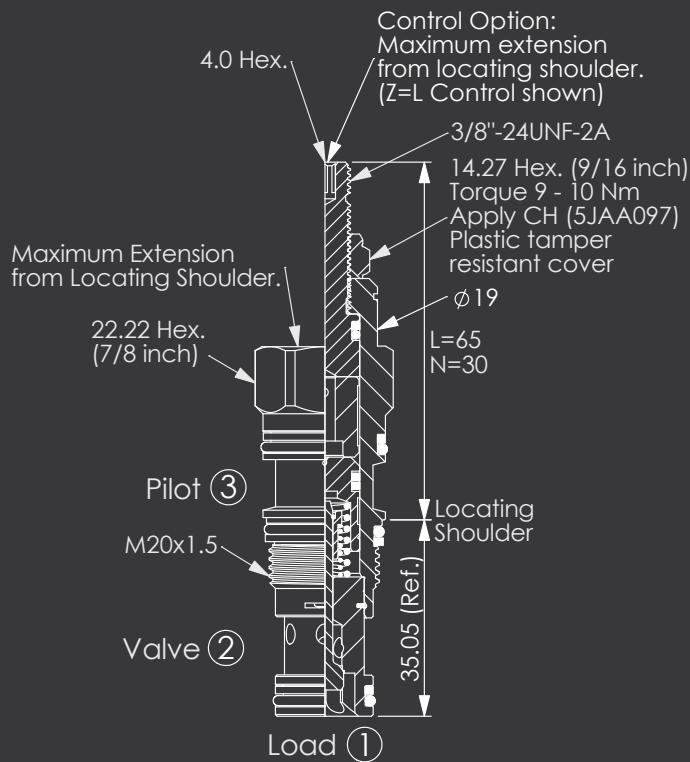
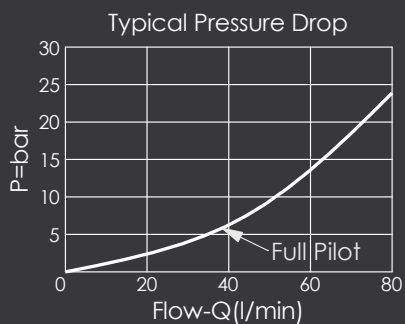


CHECK VALVE


(Pilot-To-Open)

Ordering Code: **CO-11A-X-Y-Z**

UNIT:mm

Illustrations / detail are
for reference only.
Data subject to change.

Y	SPRINGS	
	Cracking pressure	
007	0.07 bar	
03	0.3 bar	
10	1.0 bar	
20	2.0 bar	
35	3.5 bar	
50	5.0 bar	
70	7.0 bar	

**TECHNICAL DATA**

Max. Operating pressure: 350 bar

Rated flow: 60 l/min

Cavity-Tooling: 11A-3

Installation torque: 40 - 50 Nm

Weight: 0.127 (Z=N) kg

X OPERATION**30** ② to ① (Free Flow)
Pilot Ratio 3:1**3C** ② to ① (Free Flow)
Sealed Pilot Piston
Pilot Ratio 3:1**3D** ② to ① (Free Flow)
Sealed Pilot Piston
Pilot Ratio 4.2:1**3E** ② to ① (Free Flow)
Sealed Pilot Piston
Pilot Ratio 5:1**Z OPTION****N** Non-adjustable **NP** Non-adjustable
With stainless steel
external metal components
(Buna-N Seal) **L** Leakproof hex.
socket screw. **K** Handknob with
Lock Knob.
(Order Code: 6ZAK001)