CHECK VALVE

(Pilot-To-Open)

Ordering Code:	CO-11A-X-Y-Z

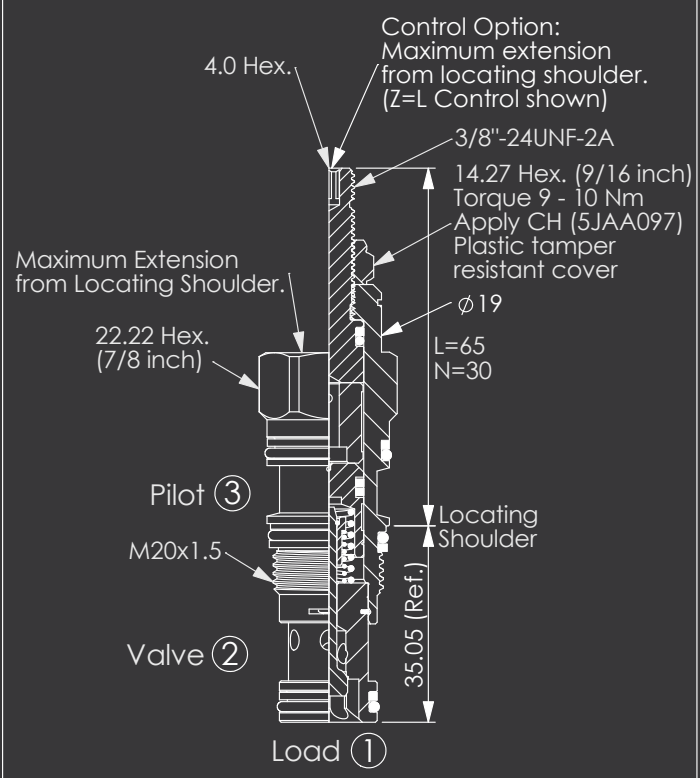

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.



TECHNICAL DATA

Max. Operating pressure:	350	bar
Rated flow:	60	l/min
Cavity-Tooling:	11A-3	
Installation torque:	40 - 50	Nm
Weight:	0.127 (**Z**=N)	kg

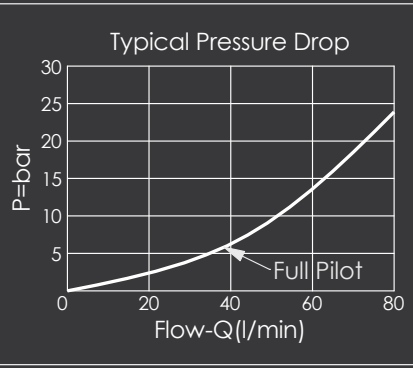

X	OPERATION	
30	② to ① (Free Flow) Pilot Ratio 3:1	
3C	② to ① (Free Flow) Sealed Pilot Piston Pilot Ratio 3:1	
3D	② to ① (Free Flow) Sealed Pilot Piston Pilot Ratio 4.2:1	
3E	② to ① (Free Flow) Sealed Pilot Piston Pilot Ratio 5:1	

Y	SPRINGS	
	Cracking pressure	
007	0.07 bar	
03	0.3 bar	
10	1.0 bar	
20	2.0 bar	
35	3.5 bar	
50	5.0 bar	
70	7.0 bar	

Z	OPTION	
N	Non-adjustable	
NP	Non-adjustable With stainless steel external metal components (Buna-N Seal)	
L	Leakproof hex. socket screw.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	