

CODE 61 FLANGE 45

Swage fitting, SFL angle 45°


STANDARD SAE J518, ISO 6162-1

SURFACE MotusCoat™

MATERIAL Steel



Application:	Swage fitting for MH800 hose
Connection 1:	SAE flange connection 3000 PSI
L1 Sealing form 1:	Flat seal with SF O-ring
Short code:	SFL
Standard:	SAE J518, ISO 6162-1
Integration:	With pull-out protection (interlock)
Included in scope of supply:	Swage nipple + swage ferrule
Material:	Steel
Surface:	MotusCoat™

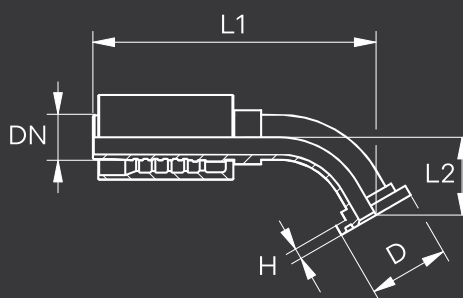

Identification	DN	Size	Inches	Flange size	D mm	H mm	L1 mm	L2 mm
STMI7-F61-45S-0808-MC	12	8	1/2"	1/2"	30.2	6.7	94.5	22.5
STMI7-F61-45S-0812-MC	12	8	1/2"	3/4"	38.1	6.7	126.0	26.5
STMI7-F61-45S-1212-MC	19	12	3/4"	3/4"	38.1	6.8	132.5	27.5
STMI7-F61-45S-1216-MC	19	12	3/4"	1"	44.5	8.1	134.5	29.5
STMI7-F61-45S-1612-MC	25	16	1"	3/4"	38.1	6.8	153.0	30.0
STMI7-F61-45S-1616-MC	25	16	1"	1"	44.5	8.1	159.0	28.5
STMI7-F61-45S-1620-MC	25	16	1"	1.1/4"	50.8	8.1	161.0	30.5
STMI7-F61-45S-2016-MC	31	20	1.1/4"	1"	44.5	8.0	170.5	35.0
STMI7-F61-45S-2020-MC	31	20	1.1/4"	1.1/4"	50.8	8.0	181.5	41.5
STMI7-F61-45S-2024-MC	31	20	1.1/4"	1.1/2"	60.3	8.0	188.0	43.5
STMI7-F61-45S-2420-MC	38	24	1.1/2"	1.1/4"	50.8	8.1	199.5	42.0
STMI7-F61-45S-2424-MC	38	24	1.1/2"	1.1/2"	60.3	8.1	212.5	41.5
STMI7-F61-45S-2432-MC	38	24	1.1/2"	2"	71.4	9.6	233.5	58.5

Product Version: Stainless Steel (SS)