


CODE 61 FLANGE 90

Swage fitting, SFL angle 90°

STANDARD SAE J518, ISO 6162-1**SURFACE** MotusCoat™**MATERIAL** Steel

Application:	Swage fitting for MH800 hose
Connection 1:	SAE flange connection 3000 PSI
Sealing form 1:	Flat seal with SF O-ring
Short code:	SFL
Standard:	SAE J518, ISO 6162-1
Integration:	With pull-out protection (interlock)
Included in scope of supply:	Swage nipple + swage ferrule
Material:	Steel
Surface:	MotusCoat™

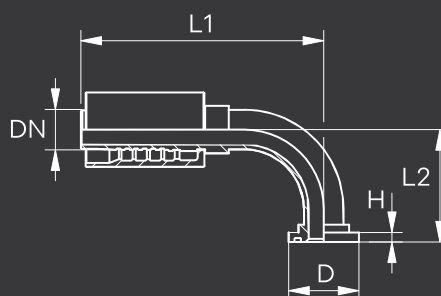

339

Identification	DN	Size	Inches	Flange size	D mm	H mm	L1 mm	L2 mm
STMI7-F61-90S-0808-MC	12	8	1/2"	1/2"	30.2	6.7	85.9	45.0
STMI7-F61-90S-0812-MC	12	8	1/2"	3/4"	38.1	6.7	96.0	51.0
STMI7-F61-90S-1212-MC	19	12	3/4"	3/4"	38.1	6.8	127.5	58.0
STMI7-F61-90S-1212-MC L95	19	12	3/4"	3/4"	38.1	6.8	127.5	95.0
STMI7-F61-90S-1212-MC L100	19	12	3/4"	3/4"	38.1	6.8	127.5	100.0
STMI7-F61-90S-1212-MC L120	19	12	3/4"	3/4"	38.1	6.8	127.5	120.0
STMI7-F61-90S-1216-MC	19	12	3/4"	1"	44.5	8.1	127.5	61.0
STMI7-F61-90S-1216-MC L82	19	12	3/4"	1"	44.5	8.1	127.5	82.0
STMI7-F61-90S-1612-MC	25	16	1"	3/4"	38.1	6.8	144.0	64.5
STMI7-F61-90S-1616-MC	25	16	1"	1"	44.5	8.1	158.0	67.0
STMI7-F61-90S-1620-MC	25	16	1"	1.1/4"	50.8	8.1	158.0	69.5
STMI7-F61-90S-2016-MC	31	20	1.1/4"	1"	44.5	8.0	162.0	76.0
STMI7-F61-90S-2020-MC	31	20	1.1/4"	1.1/4"	50.8	8.0	173.0	88.0
STMI7-F61-90S-2024-MC	31	20	1.1/4"	1.1/2"	60.3	8.0	177.0	95.0
STMI7-F61-90S-2420-MC	38	24	1.1/2"	1.1/4"	50.8	8.1	190.5	93.0
STMI7-F61-90S-2424-MC	38	24	1.1/2"	1.1/2"	60.3	8.1	208.5	99.0
STMI7-F61-90S-2432-MC	38	24	1.1/2"	2"	71.4	9.6	218.0	104.0

Product Version: Stainless Steel (SS)