


CODE 61 FLANGE SWEPT 45

SURFACE MotusCoat™

MATERIAL Steel



Application:	Swage fitting for HD 500 hoses
Connection 1:	SAE flange connection 3000 PSI
Sealing form 1:	Flat seal with SF O-ring
Short code:	SFL
DN Standard:	SAE J518, ISO 6162-1
Integration:	With pull-out protection (interlock)
Included in scope of supply:	Swage nipple + swage ferrule
Material:	Steel
Surface:	MotusCoat™

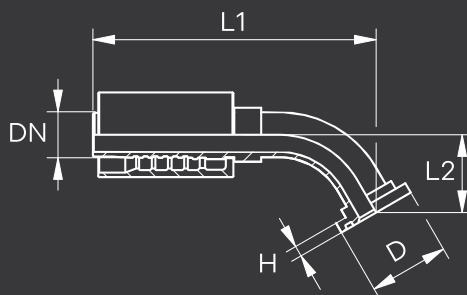

Identification	DN	Size	Inches	Flange size	D mm	H mm	L1 mm	L2 mm
STMI7-F61-45S-1212-MC	19	12	3/4"	3/4"	38.1	6.8	132.5	27.5
STMI7-F61-45S-1216-MC	19	12	3/4"	1"	44.5	8.1	134.5	29.5
STMI7-F61-45S-1612-MC	25	16	1"	3/4"	38.1	6.8	153.0	30.0
STMI7-F61-45S-1616-MC	25	16	1"	1"	44.5	8.1	159.0	28.5
STMI7-F61-45S-1620-MC	25	16	1"	1.1/4"	50.8	8.1	161.0	30.5
STMI5-F61-45S-2016-MC	31	20	1.1/4"	1"	44.5	8.0	170.5	35.0
STMI5-F61-45S-2020-MC	31	20	1.1/4"	1.1/4"	50.8	8.0	182.0	34.5
STMI5-F61-45S-2024-MC	31	20	1.1/4"	1.1/2"	60.3	8.0	187.0	37.5
STMI5-F61-45S-2420-MC	38	24	1.1/2"	1.1/4"	50.8	8.0	202.5	43.0
STMI5-F61-45S-2424-MC	38	24	1.1/2"	1.1/2"	60.3	8.0	215.0	41.5
STMI5-F61-45S-2432-MC	38	24	1.1/2"	2"	71.4	9.5	230.5	55.5
STMI5-F61-45S-3232-MC	51	32	2"	2"	71.4	9.5	263.0	58.5

Product Version: Stainless Steel (SS)