
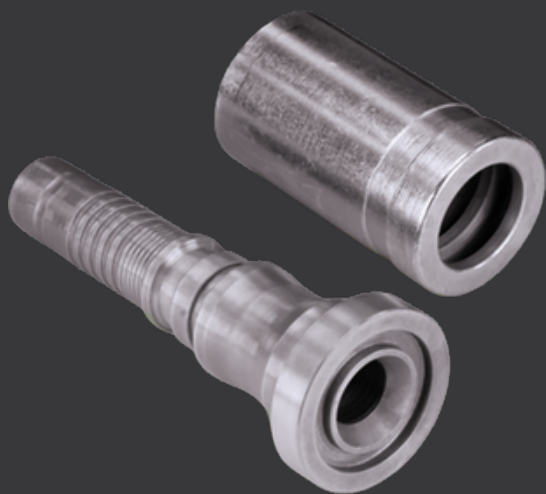


CODE 62 FLANGE

Swage fitting, SFS

STANDARD SAE J518, ISO 6162-2**SURFACE** MotusCoat™**MATERIAL** Steel

Application:	Swage fitting for MH800 hose
Connection 1:	SAE flange connection 6000 PSI
Sealing form 1:	Flat seal with SF O-ring
Short code:	SFS
Standard:	SAE J518, ISO 6162-2
Integration:	With pull-out protection (interlock)
Included in scope of supply:	Swage nipple + swage ferrule
Material:	Steel
Surface:	MotusCoat™

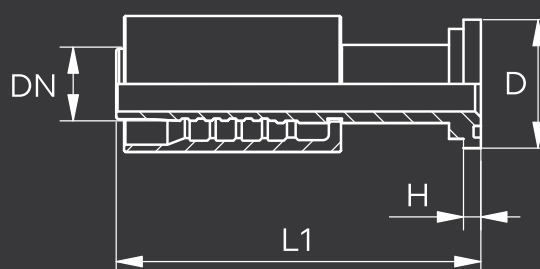

Identification	DN	Size	Inches	Flange size	D	H	L1
STMI7-F62-0808-MC	12	8	1/2"	1/2"	31.8	7.7	90.4
STMI7-F62-0812-MC	12	8	1/2"	3/4"	41.3	8.8	93.9
STMI7-F62-1008-MC	16	10	5/8"	1/2"	31.8	7.7	108.0
STMI7-F62-1016-MC	16	10	5/8"	1"	47.6	9.5	103.0
STMI7-F62-1020-MC	16	10	5/8"	3/4"	41.3	8.8	102.0
STMI7-F62-1212-MC	19	12	3/4"	3/4"	41.3	8.8	124.5
STMI7-F62-1216-MC	19	12	3/4"	1"	47.6	9.6	129.0
STMI7-F62-1612-MC	25	16	1"	3/4"	41.3	8.8	134.0
STMI7-F62-1616-MC	25	16	1"	1"	47.6	9.6	146.5
STMI7-F62-1620-MC	25	16	1"	1.1/4"	54.0	10.4	151.0
STMI7-F62-2016-MC	31	20	1.1/4"	1"	47.6	9.5	149.0
STMI7-F62-2020-MC	31	20	1.1/4"	1.1/4"	54.0	10.3	147.6
STMI7-F62-2024-MC	31	20	1.1/4"	1.1/2"	63.5	12.6	162.0
STMI7-F62-2420-MC	38	24	1.1/2"	1.1/4"	54.0	10.4	162.0
STMI7-F62-2424-MC	38	24	1.1/2"	1.1/2"	63.5	12.7	183.5
STMI7-F62-2432-MC	38	24	1.1/2"	2"	79.4	12.7	188.0
STMI7-F62-3232-MC	51	32	2"	2"	79.4	12.6	233.0

Product Version: Stainless Steel (SS)