

CODE 62 FLANGE

STANDARD SAE J518, ISO 6162-2 | SURFACE MotusCoat™ | MATERIAL Steel

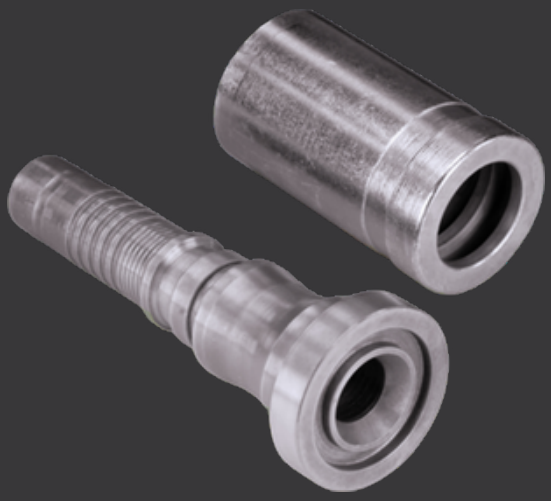

Application:	Swage fitting for HD 500 hoses
Connection 1:	SAE flange connection 6000 PSI
Sealing form 1:	Flat seal with SF O-ring
Short code:	SFS
Standard:	SAE J518, ISO 6162-2
Integration:	With pull-out protection (interlock)
Included in scope of supply:	Swage nipple + swage ferrule
Material:	Steel
Surface:	MotusCoat™

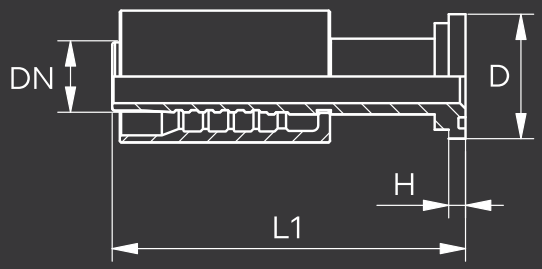

Identification	DN	Size	Inches	Flange size	D mm	H mm	L1 mm
STMI7-F62-1212-MC	19	12	3/4″	3/4″	41.3	8.8	124.5
STMI7-F62-1216-MC	19	12	3/4″	1″	47.6	9.6	129.0
STMI7-F62-1612-MC	25	16	1″	3/4″	41.3	8.8	134.0
STMI7-F62-1616-MC	25	16	1″	1″	47.6	9.6	146.5
STMI7-F62-1620-MC	25	16	1″	1.1/4″	54.0	10.4	151.0
STMI5-F62-2016-MC	31	20	1.1/4″	1″	47.6	9.6	149.0
STMI5-F62-2020-MC	31	20	1.1/4″	1.1/4″	54.0	10.4	162.5
STMI5-F62-2024-MC	31	20	1.1/4″	1.1/2″	63.5	12.7	167.0
STMI5-F62-2420-MC	38	24	1.1/2″	1.1/4″	54.0	10.4	162.0
STMI5-F62-2424-MC	38	24	1.1/2″	1.1/2″	63.5	12.7	183.5
STMI5-F62-2432-MC	38	24	1.1/2″	2″	79.4	12.7	188.0
STMI5-F62-3232-MC	51	32	2″	2″	79.4	12.7	202.0

Product Version: Stainless Steel (SS)