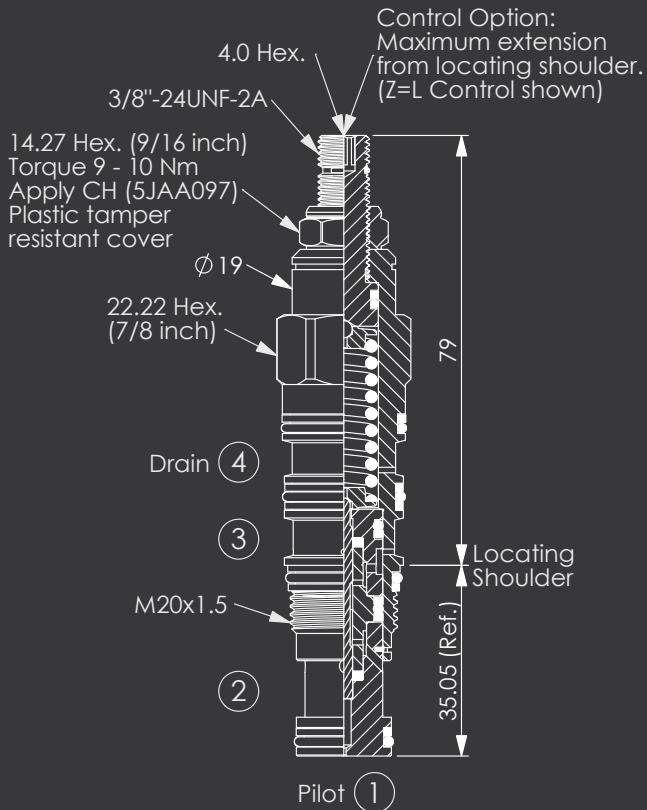



DIRECTIONAL VALVE


(2-Way, 2-Position, Pilot-to-Shift, Direct Acting, Normally Open, Drain)

Ordering Code: **DD-21A-X-Y-Z**

UNIT:mm

Illustrations / detail are
for reference only.
Data subject to change.**TECHNICAL DATA**

Max. pressure:	350	bar
Rated flow:	2	l/min
Cavity-Tooling:	21A-4	
Installation torque:	40 - 50	Nm
Weight:	0.195 (Z=L)	kg

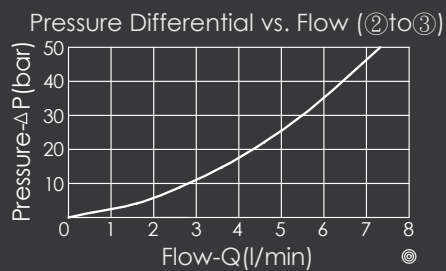**X OPERATION****45**

Normally-Open,
Port ② to Port ③,
Port ① pilot to shift,
Closed Port ② to Port ③

• Maximum Leakage Approximately
(20 drops/min.)

Y PRESSURE SETTING**A** 70 - 210 bar (70 bar Standard Setting)**C** 140 - 420 bar (140 bar Standard Setting)**Z OPTIONS****L** Leakproof hex.
socket screw.**C** Stainless Steel
Tamper Resistant
Cover.