
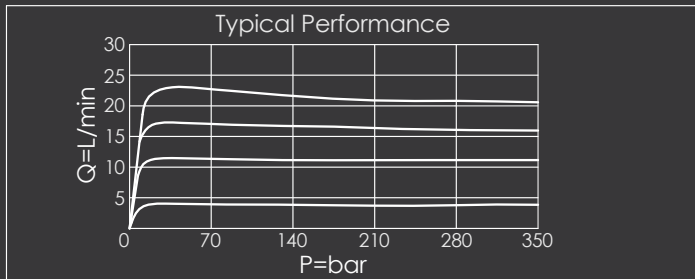



FLOW CONTROL VALVE

(Fixed Orifice, Pressure Compensated, with Reverse Flow Check)

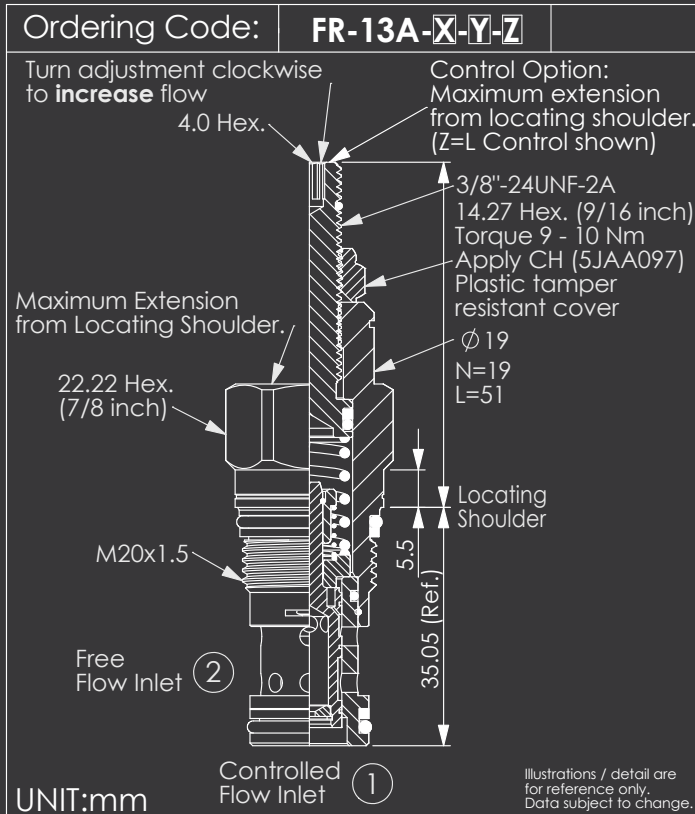

Y	FLOW SETTING	
0040	0.4 LPM	
0150	1.5 LPM	
0200	2.0 LPM	
0240	2.4 LPM	
0400	4.0 LPM	
1000	10.0 LPM	
1050	10.5 LPM	
1300	13.0 LPM	
1500	15.0 LPM	
1800	18.0 LPM	
2300	23.0 LPM	

• Factory set flow ratings are within $\pm 10\%$ of the requested setting
 • Customer must specify a flow rating
 • If you need specific flow accuracy, please contact MOTUS sales department



TECHNICAL DATA

Max. Operating pressure:	350 bar
Rated flow:	0.4 - 23 l/min
Cavity-Tooling:	13A-2
Installation torque:	40 - 50 Nm
Weight:	0.10 (Z=N) 0.14 (Z=L) kg

X	OPERATION
2C	Fixed Setting, with Reverse Flow Check

Z	OPTIONS
N	Non-adjustable 
L	Leakproof hex. socket screw. (Adjustment Ranges Approx. $\pm 25\%$) 
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 