


FLOW CONTROL VALVE

(Fully Adjustable Needle Valve, High Capacity)

Ordering Code: **NV-5A-X-Y-Z**

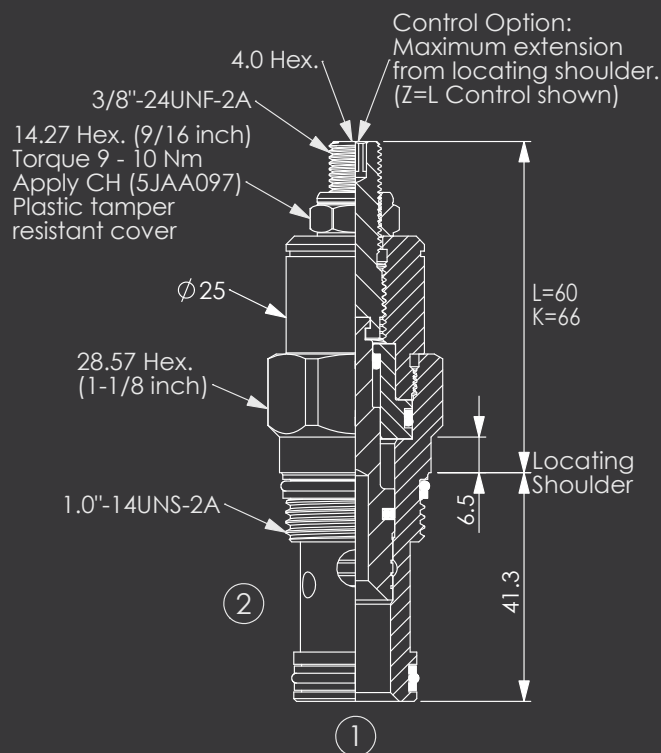

UNIT:mm

Illustrations / detail are for reference only.
Data subject to change.



TECHNICAL DATA

Max. operating pressure: 350 bar
(Refer To Performance Chart)

Rated flow: 170 l/min
(Refer To Performance Chart)


Cavity-Tooling: 5A-2

Installation torque: 60 - 70 Nm

Weight: 0.27 (Z=L) kg

Performance Chart

FULLY OPEN RESTRICTOR-FLOW IN BOTH DIRECTIONS

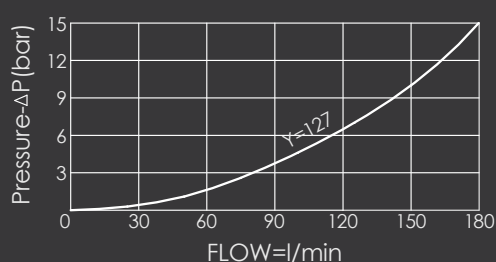

Y MAXIMUM NOMINAL ORIFICE DIAMETER

127 ϕ 12.7 mm

X OPERATION

28 Fully Adjustable Needle Valve

Z OPTIONS

L Leakproof hex. socket screw.



LP Leakproof hex. socket screw. With stainless steel external metal components



K Handknob with Lock Knob. (Order Code: 6ZAK001)



T Three-winged Handknob Kit.

