



FLOW CONTROL VALVE

(Fully Adjustable Needle with Reverse Flow Check)

Ordering Code: **NC-162A-X-Y-Z**

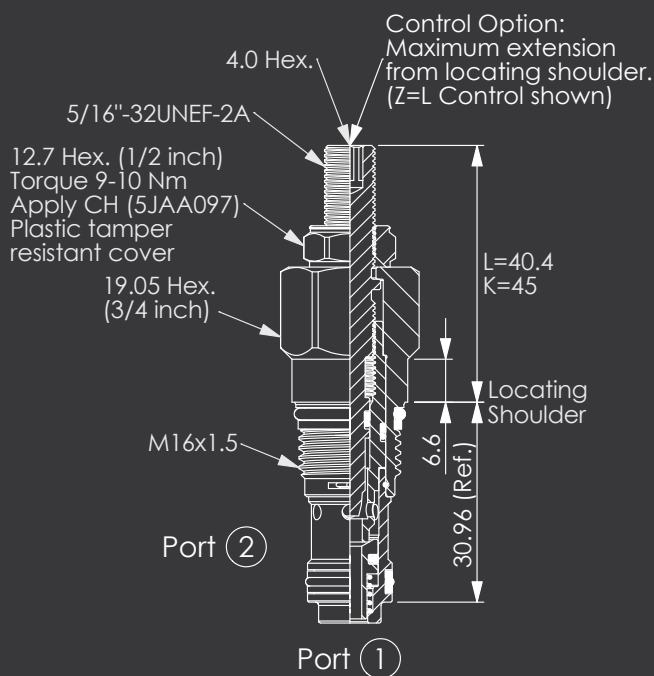

UNIT:mm

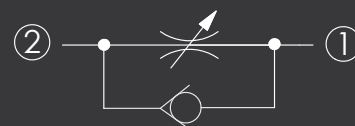

TECHNICAL DATA

Max. operating pressure: 350 bar
(Refer To Performance Chart)

Rated flow: 15 l/min
(Refer To Performance Chart)


Cavity-Tooling: 162A-2

Installation torque: 27-33 Nm

Weight: 0.07 (Z=L) kg

Performance Chart

When the valve is fully open, port ① to port ②

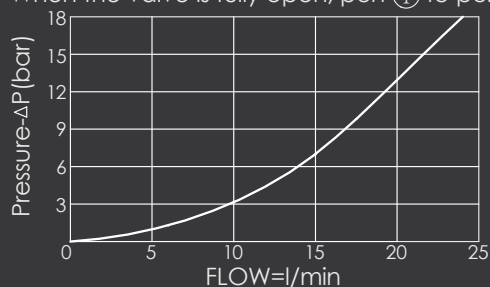

X

OPERATION

21

② to ① (Free Flow)

Y

OPTIONS

Maximum Nominal Orifice
(Refer To Performance Chart)

Cracking Pressure

BC

Ø 4.0 mm

2.0 bar

Z

OPTIONS

L

Leakproof hex. socket screw.



LP

Leakproof hex. socket screw.
With stainless steel external metal components



K

Handknob with Lock Knob.
(Order Code: 7ZAK001)

