
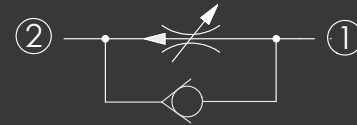


FLOW CONTROL VALVE

(Fully Adjustable Pressure Compensated Flow Control Valve with Reverse Flow Check and Sharp-Edge Orifice)

Ordering Code: **FR-16A-X-Y-Z**

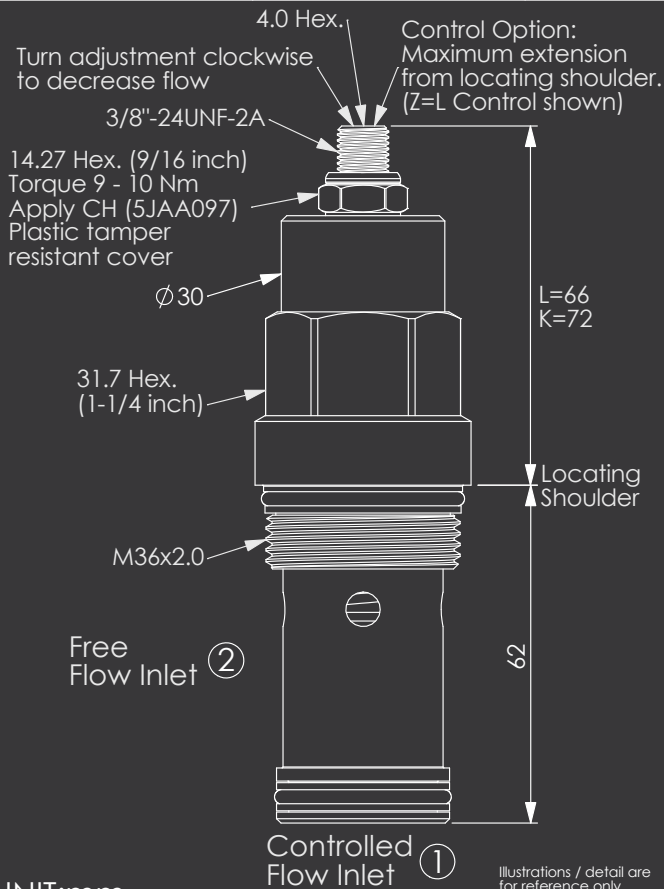

TECHNICAL DATA

Max. Operating pressure:	350 bar
Rated flow:	95 l/min
Cavity-Tooling:	16A-2
Installation torque:	200 - 215 Nm
Weight:	0.52 kg
Accurate pressure compensated control requires that a 200 psi (14 bar) minimum pressure differential be maintained across the valve.	

X OPERATION

20 Standard Type

Y FLOW SETTING

A 0.8 - 95 LPM

B 0.8 - 60 LPM

Z OPTIONS

L Leakproof hex. socket screw.



LP Leakproof hex. socket screw. With Stainless Steel External Components



T Three-winged Handknob Kit.



K Handknob with Lock Knob. (Order Code: 6ZAK001)

