


FLOW CONTROL VALVE


(Fully Adjustable Pressure Compensated Flow Control Valve with Reverse Flow Check and Sharp-Edge Orifice)

Ordering Code: **FR-5A-X-Y-Z**

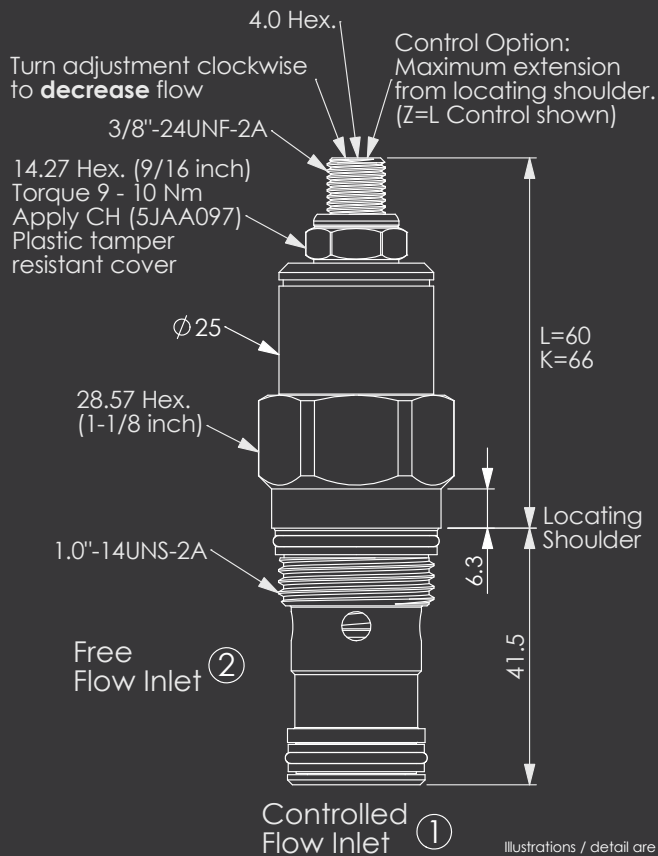

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

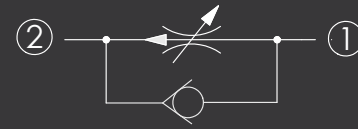

TECHNICAL DATA

Max. Operating pressure: 350 bar



Rated flow: 45 l/min

Cavity-Tooling: 5A-2

Installation torque: 60 - 70 Nm

Weight: 0.27 kg

Accurate pressure compensated control requires that a 200 psi (14 bar) minimum pressure differential be maintained across the valve.

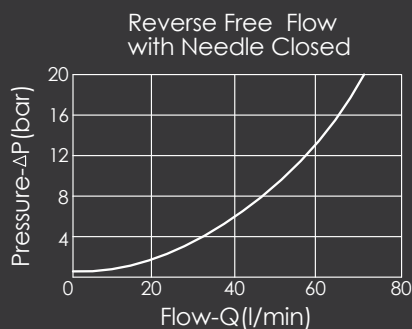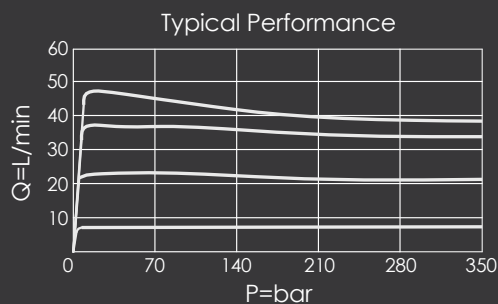

X OPERATION

20 Standard Type

Y FLOW SETTING

A 0.4 - 45 LPM

Z OPTIONS

L Leakproof hex. socket screw.



LP Leakproof hex. socket screw. With Stainless Steel External Components



T Three-winged Handknob Kit.



K Handknob with Lock Knob. (Order Code: 6ZAK001)

