



FLOW DIVIDER VALVE

Ordering Code: **FD-31A-X-Y-Z**

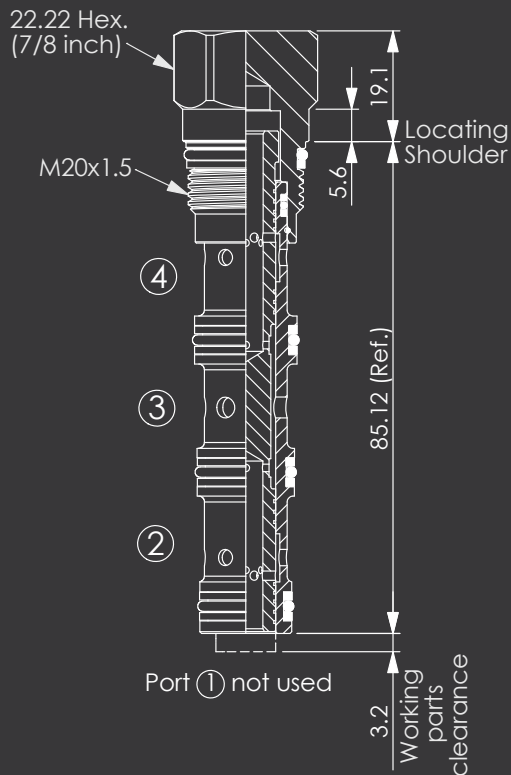

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.



TECHNICAL DATA

Max. Operating pressure: 350 bar

Divisional accuracy at rated maximum inlet flow = 30 l/min $\pm 3.5\%$

Divisional accuracy at rated minimum inlet flow = 6 l/min $\pm 6.5\%$

Cavity-Tooling: 31A-4


Installation torque: 40 - 50 Nm

Weight: 0.151 kg

Capacity: 6 - 30 LPM

Split	Inlet Flow		Rated Accuracy	Maximum Possible Flow Variation
				High Flow Leg
50:50	Max. Rated	30 L/min	$\pm 3.5\%$	14.1 - 15.9 L/min
	Min. Rated	6 L/min	$\pm 6.5\%$	2.5 - 3.5 L/min

The maximum variation is at 350 bar differential between legs with the high pressure leg being the higher flow.

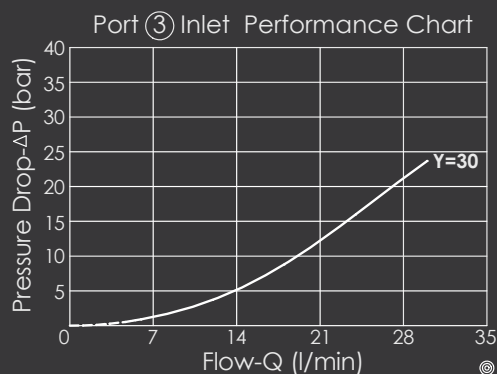

X OPERATION

41 4 Ports;Flow Divider

Y NOMINAL CAPACITY

30 6 - 30 LPM

Z OPTIONS

N Non-adjustable

