
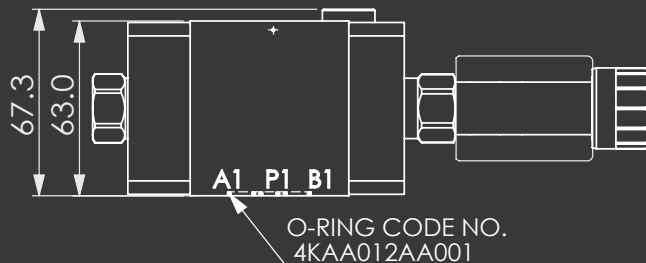


ISO 03 COVER MANIFOLD

Ordering Code: **MK03EPX-X-Y-Z 03**


Stack Height : 63.0mm

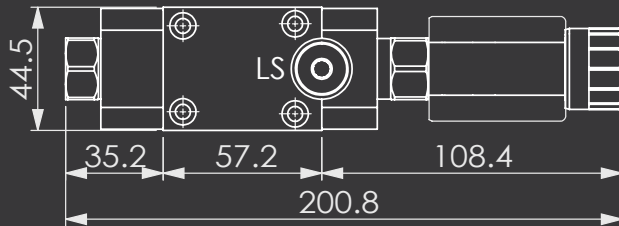

UNIT:mm



Typical Metering Performance (①→②)

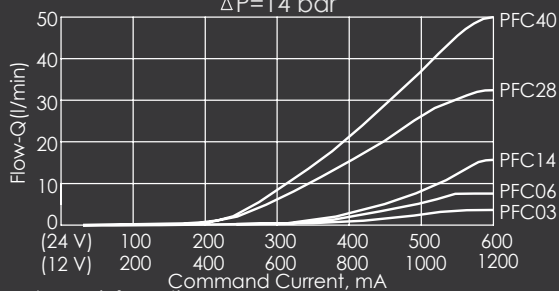 $\Delta P=14$ bar


If you need more information
Please contact our sales department

Y**SELECTION FOR FLOW CONTROL VALVE
(REFER TO PFC13A-X-Y-Z)**

13A2	CAVITY ONLY(WITHOUT VALVE)
PFC03	PFC13A2D0030N(0.3~3LPM)
PFC06	PFC13A2D0060N(0.4~6LPM)
PFC14	PFC13A2D0140N(0.6~14LPM)
PFC28	PFC13A2D0280N(0.8~28LPM)
PFC40	PFC13A2D0400N(1.0~40LPM)

COIL MUST BE ORDERED SEPARATELY
(REFER TO EC-19A-X-Y-Z)

LS (G1/4")

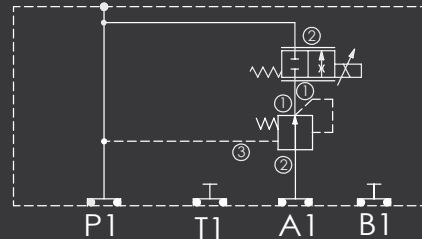**TECHNICAL DATA**

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:

Refer to LP11A-X-Y-Z

PFC13A-X-Y-Z

* Refer to Motus Cartridge Valves Catalog.

Aluminum	0.63 kg(WITHOUT VALVES) 1.2 kg(INCLUDE VALVES ,WITHOUT COIL)
----------	--

* If you need the special specification.
Please contact us.

X**SELECTION FOR COMPENSATOR****11A3** CAVITY ONLY(WITHOUT VALVE)**LP140** LP11A30140N(60LPM,14.0bar)

Please refer to the list price of cartridge program.

Z**BODY MATERIAL****A**

HIGH-STRENGTH ALUMINUM