
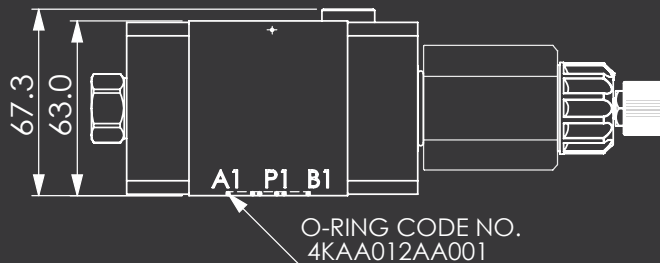



ISO 03 COVER MANIFOLD

Ordering Code: **MK03EPX-X-Y-Z 03**

Stack Height : 63.0mm

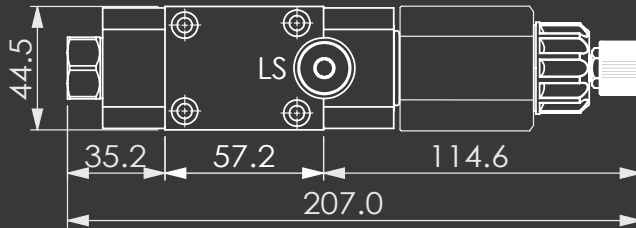

UNIT:mm

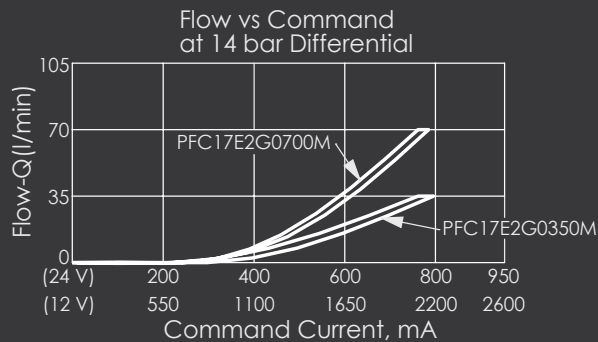


Y

SELECTION FOR FLOW CONTROL VALVE
(REFER TO PFC17E-X-Y-Z)

17E2	CAVITY ONLY(WITHOUT VALVE)
PFC35	PFC17E2G0350M(35LPM)
PFC70	PFC17E2G0700M(70LPM)

COIL MUST BE ORDERED SEPARATELY
(REFER TO EC-23C-X-Y-Z)

LS (G1/4")

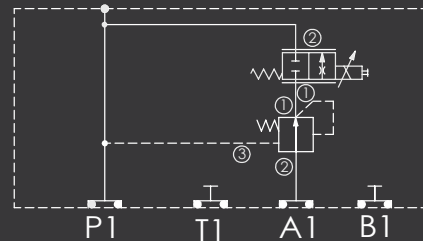

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:

Refer to LP11A-X-Y-Z

PFC17E-X-Y-Z

* Refer to Motus Cartridge Valves Catalog.

Aluminum	0.63 kg(WITHOUT VALVES)
	1.2 kg(INCLUDE VALVES ,WITHOUT COIL)

* If you need the special specification.
Please contact us.

X

SELECTION FOR COMPENSATOR

11A3 CAVITY ONLY(WITHOUT VALVE)**LP140** LP11A30140N(60LPM,14.0bar)

Please refer to the list price of cartridge program.

Z

BODY MATERIAL

A

HIGH-STRENGTH ALUMINUM