
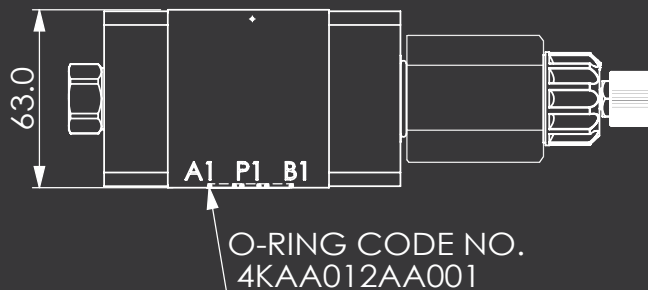



ISO 03 COVER MANIFOLD

MK03ERX-**X**-**Y**-S03-**Z**

Stack Height : 63.0mm

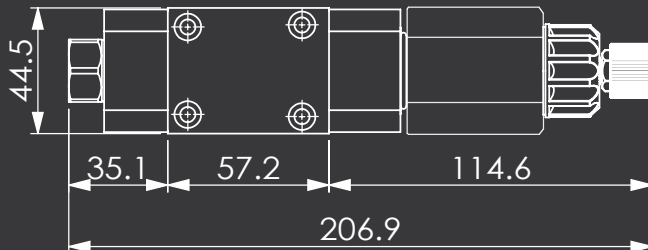


UNIT:mm

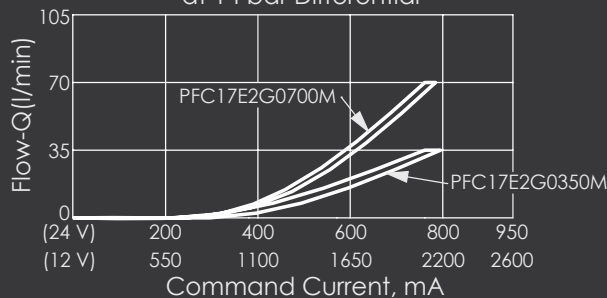Flow vs Command
at 14 bar Differential

Y	SELECTION FOR FLOW CONTROL VALVE (REFER TO PFC17E- X - Y - Z)
17E2	CAVITY ONLY(WITHOUT VALVE)
PFC35	PFC17E2G0350M(35LPM)
PFC70	PFC17E2G0700M(70LPM)
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-23C- X - Y - Z)	

Rev.230803

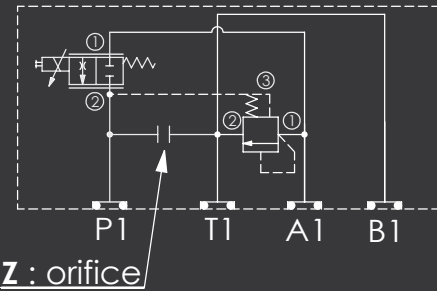

TECHNICAL DATA

Aluminum(A03)	210 bar
Body Pressure Rating:	
Ductile Iron(S03)	350 bar
Body Pressure Rating:	

Rated flow: 40 l/min

Cartridge Valve:

Refer to LR11A-**X**-**Y**-**Z**PFC17E-**X**-**Y**-**Z**

* Refer to Motus Cartridge Valves Catalog.

Aluminum	0.63 kg(WITHOUT VALVES) 1.2 kg(INCLUDE VALVES WITHOUT COIL)
Ductile Iron	1.83 kg(WITHOUT VALVES) 2.4 kg(INCLUDE VALVES WITHOUT COIL)

* If you need the special specification.
Please contact us.**X**

SELECTION FOR COMPENSATOR

11A3 CAVITY ONLY(WITHOUT VALVE)**LR140** LR11A30140N(60LPM,14.0bar)

Please refer to the list price of cartridge program.

Z

ORIFICE DIAMETER (mm)

without orifice

05 ϕ 0.5 mm
(M5xP0.8 Plug)**07** ϕ 0.7 mm
(M5xP0.8 Plug)

M.ERX.371