
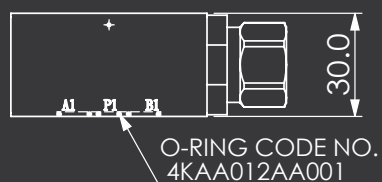



ISO 03 SANDWICH MANIFOLD

Ordering Code: **MH03BBB-X-Y-Z04**

Stack Height : 30.0mm

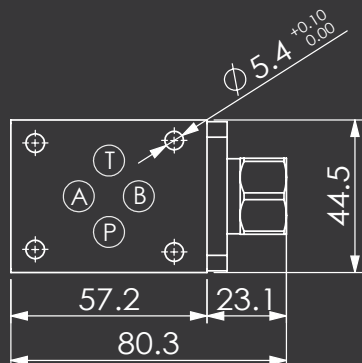

UNIT:mm

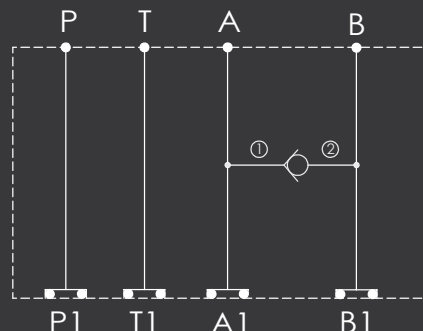

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:

Refe



* Refer to Motus Cartridge Valves Catalog.

Aluminum	0.18 kg(WITHOUT VALVE)
	0.28 kg(INCLUDE VALVE)
Ductile Iron	0.52 kg(WITHOUT VALVE)
	0.62 kg(INCLUDE VALVE)

* If you need the special specification.
 Please contact us.

Typical Pressure Drop

**X SELECTION FOR A PORT CONTROL****N WITHOUT PORT****Y****SELECTION FOR B PORT CONTROL**

13A2 CAVITY ONLY(WITHOUT VALVE)
CV2020 CV13A2020N (80LPM , 2.0bar)

Z**BODY MATERIAL****A HIGH-STRENGTH ALUMINUM****S DUCTILE IRON**

Please refer to the list price of cartridge program.

Rev.220323

M.BBB.301