
# JIC MALE

STANDARD ISO 8434-2 | SURFACE MotusCoat™ | MATERIAL Steel



| | |
|---|---|
| **Application:** | Swage fitting for HD 500 hoses |
| **Connection 1:** | UN / UNF external threads |
| **Sealing form 1:** | 74° outer cone |
| **Short code:** | AGJ |
| **Standard:** | ISO 8434-2 |
| **Integration:** | With pull-out protection (interlock) |
| **Included in scope of supply:** | Swage nipple + swage ferrule |
| **Material:** | Steel |
| **Surface:** | MotusCoat™ |

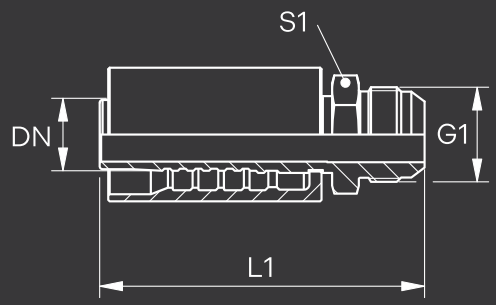


| Identification | DN | Size | Inches | G1 | L1 | S1 |
|---|---|---|---|---|---|---|
| STMI7-JIM-1212-MC | 19 | 12 | 3/4″ | 1.1/16″–12 UN | 102.5 | 27 |
| STMI7-JIM-1616-MC | 25 | 16 | 1″ | 1.5/16″–12 UN | 117.0 | 36 |
| STMI5-JIM-2020-MC | 31 | 20 | 1.1/4″ | 1.5/8″–12 UN | 127.0 | 46 |
| STMI5-JIM-2024-MC | 31 | 20 | 1.1/4″ | 1.7/8″–12 UN | - | - |
| STMI5-JIM-2424-MC | 38 | 24 | 1.1/2″ | 1.7/8″–12 UN | 145.5 | 50 |
| STMI5-JIM-2432-MC | 38 | 24 | 1.1/2″ | 2.1/2″–12 UN | - | - |
| STMI5-JIM-3232-MC | 51 | 32 | 2″ | 2.1/2″–12 UN | 169.5 | 65 |

Product Version: Stainless Steel (SS)