
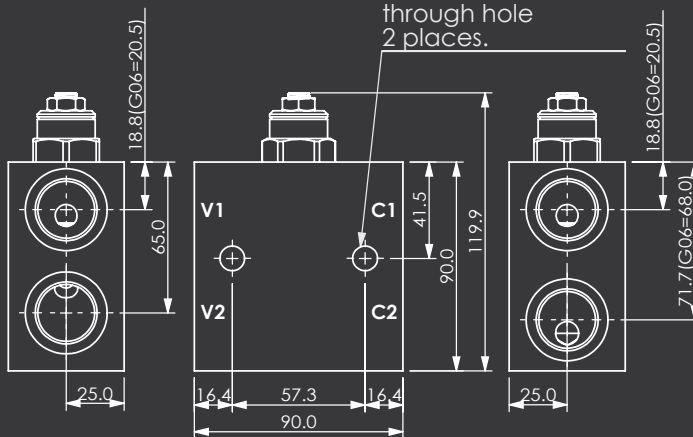



LINE MOUNT BODIES

 Ordering Code: ☐ ☐ ☐

Stack Height : 50.0mm


 Mounting Holes:
 $\varnothing 10.7$ mm. diameter
 through hole
 2 places.


UNIT:mm

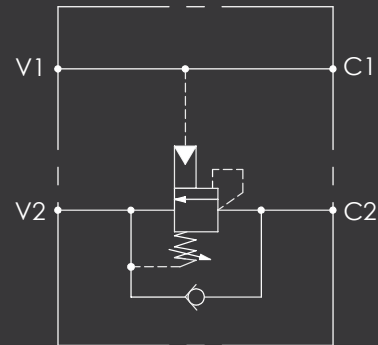

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Steel Body Pressure Rating: 350 bar


Rated flow: 120 l/min

Cartridge Valve:

 Ref ☐ ☐ ☐

* Refer to Motus Cartridge Valves Catalog.

Aluminum	0.83 kg(WITHOUT VALVES)
	1.23 kg(INCLUDE VALVES)
Steel	2.31 kg(WITHOUT VALVES)
	2.71 kg(INCLUDE VALVES)

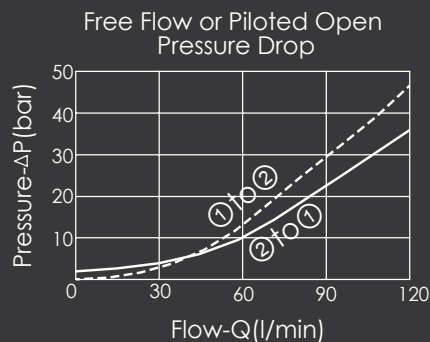 * If you need the special specification.
 Please contact us.


PORT SIZE

X	PORTS	PORTS	
	V1,V2	C1,C2	
G04	G 1/2"	G 1/2"	
G06	G 3/4"	G 3/4"	
S10	SAE 10	SAE 10	

Y

BODY MATERIAL

A

HIGH-STRENGTH ALUMINUM

T

STEEL (black oxide)

Z

CARTRIDGE VALVES SELECTION

WITHOUT VALVE

CB3H CB2A33HL (3:1 , 7-280bar)

CB4J CB2A34JL (4.5:1 , 350bar)

CB0J CB2A30JL (10:1 , 350bar)

Please refer to the list price of cartridge program.

Rev.240604

M.02A.801