

METRIC IN HEX PLUG (CAPTIVE SEAL)


Blanking screw with hexagon socket

SURFACE MotusCoat™

MATERIAL Steel



Connection 1:	Metric cylindrical outer thread
Sealing form 1:	Shape E
Design:	Blanking screw with hexagon socket
Construction:	Straight
Material:	Steel
Surface:	MotusCoat™

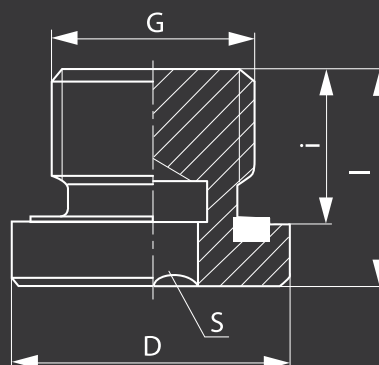

Identification	Working pressure bar	G	D mm	i mm	l mm	S mm
IHPM-ED-0810-MC	PN 400	M 8 x 1	12.0	8	12.0	4
IHPM-ED-1010-MC	PN 400	M 10 x 1	14.0	8	12.0	5
IHPM-ED-1215-MC	PN 400	M 12 x 1.5	17.0	12	17.0	6
IHPM-ED-1415-MC	PN 400	M 14 x 1.5	19.0	12	17.0	6
IHPM-ED-1615-MC	PN 400	M 16 x 1.5	22.0	12	17.0	8
IHPM-ED-1815-MC	PN 400	M 18 x 1.5	24.0	12	17.0	8
IHPM-ED-2015-MC	PN 400	M 20 x 1.5	26.0	14	19.0	10
IHPM-ED-2215-MC	PN 400	M 22 x 1.5	27.0	14	19.0	10
IHPM-ED-2415-MC	PN 400	M 24 x 1.5	29.9	14	19.0	12
IHPM-ED-2615-MC	PN 400	M 26 x 1.5	32.0	16	21.0	12
IHPM-ED-2720-MC	PN 400	M 27 x 2	32.0	16	21.0	12
IHPM-ED-3320-MC	PN 400	M 33 x 2	40.0	16	22.5	17
IHPM-ED-4220-MC	PN 315	M 42 x 2	50.0	16	22.5	22
IHPM-ED-4820-MC	PN 315	M 48 x 2	55.0	16	22.5	24

PN = Nominal pressure PB = Max. operating pressure Product Version: Stainless Steel (SS)