

METRIC MALE 90

Fitting, angle 90°


STANDARD DIN 2353, ISO 8434-1

SURFACE MotusCoat™

MATERIAL Steel



Connection 1+2:	Metric cylindrical outer thread
Sealing form 1+2:	24° inner cone
Design:	Fitting
Construction:	Angle 90°
Standard:	DIN 2353, ISO 8434-1
Included in scope of supply:	Socket (without union nut and cutting ring)
Material:	Steel
Surface:	MotusCoat™

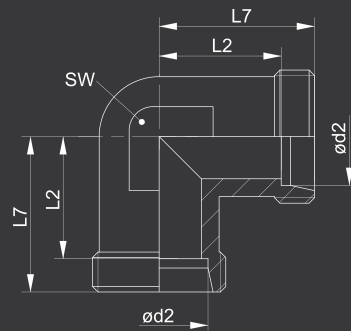

Identification	Series	Working pressure bar	External pipe Ø mm	L2 mm	L7 mm	SW mm
MLLM-MLLM-90C-0808-MC	LL	PN 100	4	11.0	15	9
MLLM-MLLM-90C-0909-MC	LL	PN 100	5	9.5	15	9
MLLM-MLLM-90C-1010-MC	LL	PN 100	6	9.5	15	9
MLLM-MLLM-90C-1212-MC	LL	PN 100	8	11.5	17	12
MLLM-MLLM-90C-1414-MC	LL	PN 100	10	12.5	18	14
MLLM-MLLM-90C-1616-MC	LL	PN 100	12	13.0	19	17
MLM-MLM-90C-1212-MC	L	PN 315	6	12.0	19	12
MLM-MLM-90C-1414-MC	L	PN 315	8	14.0	21	12
MLM-MLM-90C-1616-MC	L	PN 315	10	15.0	22	14
MLM-MLM-90C-1818-MC	L	PN 315	12	17.0	24	17
MLM-MLM-90C-2222-MC	L	PN 315	15	21.0	28	19
MLM-MLM-90C-2626-MC	L	PN 315	18	23.5	31	24
MLM-MLM-90C-3030-MC	L	PN 160	22	27.5	35	27
MLM-MLM-90C-3636-MC	L	PN 160	28	30.5	38	36
MLM-MLM-90C-4545-MC	L	PN 160	35	34.5	45	41
MLM-MLM-90C-5252-MC	L	PN 160	42	40.0	51	50
MHM-MHM-90C-1414-MC	S	PN 630	6	16.0	23	12
MHM-MHM-90C-1616-MC	S	PN 630	8	17.0	24	14
MHM-MHM-90C-1818-MC	S	PN 630	10	17.5	25	17
MHM-MHM-90C-2020-MC	S	PN 630	12	21.5	29	17
MHM-MHM-90C-2222-MC	S	PN 630	14	22.0	30	19
MHM-MHM-90C-2424-MC	S	PN 400	16	24.5	33	24
MHM-MHM-90C-3030-MC	S	PN 400	20	26.5	37	27
MHM-MHM-90C-3636-MC	S	PN 400	25	30.0	42	36
MHM-MHM-90C-4242-MC	S	PN 400	30	35.5	49	41
MHM-MHM-90C-5252-MC	S	PN 315	38	41.0	57	50

Series: LL = Very Light L = Light S = Heavy PN = Nominal pressure PB = Max. operating pressure Ø d2 = External pipe diameter Product Version: Stainless Steel (SS)