


METRIC MALE / NP TAPERED MALE (GE - NPT)

Screw-in fitting


STANDARD DIN 2353, ISO 8434-1

SURFACE MotusCoat™

MATERIAL Steel

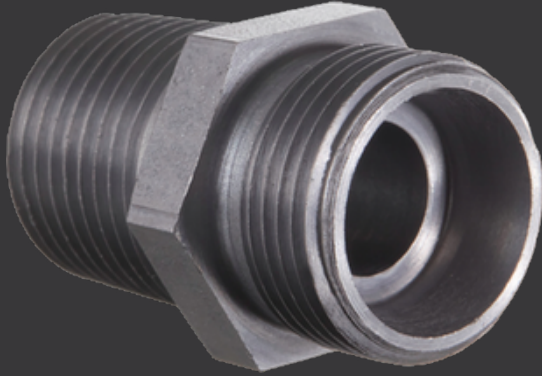

Connection 1:	NPT external threads
Sealing form 1:	Thread seal
Connection 2:	Metric cylindrical outer thread
Sealing form 2:	24° inner cone
Design:	Screw-in fitting
Construction:	Straight
Standard:	DIN 2353, ISO 8434-1
Included in scope of supply:	Socket (without union nut and cutting ring)
Material:	Steel
Surface:	MotusCoat™



Identification	Series	Working pressure bar	Ø d2 mm	G	i mm	L2 mm	L7 mm	SW mm
NTM-MLLM-0208-MC	LL	PN 100	4	1/8"-27 NPT	10.0	18.0	22.0	11
NTM-MLLM-0209-MC	LL	PN 100	5	1/8"-27 NPT	10.0	16.5	22.0	11
NTM-MLLM-0210-MC	LL	PN 100	6	1/8"-27 NPT	10.0	16.5	22.0	11
NTM-MLLM-0212-MC	LL	PN 100	8	1/8"-27 NPT	10.0	18.5	24.0	12
NTM-MLM-0212-MC	L	PN 315	6	1/8"-27 NPT	10.0	17.0	24.0	12
NTM-MLM-0214-MC	L	PN 315	8	1/8"-27 NPT	10.0	18.0	25.0	17
NTM-MLM-0216-MC	L	PN 315	10	1/8"-27 NPT	10.0	19.0	26.0	17
NTM-MLM-0218-MC	L	PN 315	12	1/8"-27 NPT	10.0	19.5	26.5	19
NTM-MLM-0412-MC	L	PN 315	6	1/4"-18 NPT	15.0	23.0	30.0	17
NTM-MLM-0414-MC	L	PN 315	8	1/4"-18 NPT	15.0	23.0	30.0	17
NTM-MLM-0416-MC	L	PN 315	10	1/4"-18 NPT	15.0	24.0	31.0	17
NTM-MLM-0418-MC	L	PN 315	12	1/4"-18 NPT	15.0	25.0	32.0	19
NTM-MLM-0422-MC	L	PN 315	15	1/4"-18 NPT	15.0	26.0	33.0	24
NTM-MLM-0426-MC	L	PN 315	18	1/4"-18 NPT	15.0	26.5	34.0	27
NTM-MLM-0612-MC	L	PN 315	6	3/8"-18 NPT	15.3	24.0	31.0	19
NTM-MLM-0614-MC	L	PN 315	8	3/8"-18 NPT	15.3	24.0	31.0	19
NTM-MLM-0616-MC	L	PN 315	10	3/8"-18 NPT	15.3	25.0	32.0	19
NTM-MLM-0618-MC	L	PN 315	12	3/8"-18 NPT	15.3	25.0	32.0	19
NTM-MLM-0622-MC	L	PN 315	15	3/8"-18 NPT	15.3	26.5	33.5	24
NTM-MLM-0812-MC	L	PN 315	6	1/2"-14 NPT	20.0	29.0	36.0	24
NTM-MLM-0814-MC	L	PN 315	8	1/2"-14 NPT	20.0	29.0	36.0	24
NTM-MLM-0816-MC	L	PN 315	10	1/2"-14 NPT	20.0	30.0	37.0	24
NTM-MLM-0818-MC	L	PN 315	12	1/2"-14 NPT	20.0	30.0	37.0	24
NTM-MLM-0822-MC	L	PN 315	15	1/2"-14 NPT	20.0	31.0	38.0	24

METRIC MALE / NP TAPERED MALE (GE - NPT) (CONTINUED)

Screw-in fitting

Identification	Series	Working pressure bar	Ø d2 mm	G	i mm	L2 mm	L7 mm	SW mm
NTM-MLM-0826-MC	L	PN 315	18	1/2"-14 NPT	20.0	31.5	39.0	27
NTM-MLM-0830-MC	L	PN 160	22	1/2"-14 NPT	20.0	33.5	41.0	32
NTM-MLM-1218-MC	L	PN 315	12	3/4"-14 NPT	20.2	31.0	38.0	27
NTM-MLM-1222-MC	L	PN 315	15	3/4"-14 NPT	20.2	32.0	39.0	27
NTM-MLM-1226-MC	L	PN 315	18	3/4"-14 NPT	20.2	31.5	39.0	27
NTM-MLM-1230-MC	L	PN 160	22	3/4"-14 NPT	20.2	33.5	41.0	32
NTM-MLM-1636-MC	L	PN 160	28	1"-11.5 NPT	25.0	39.5	47.0	41
NTM-MLM-1645-MC	L	PN 160	35	1"-11.5 NPT	25.0	40.0	50.5	46
NTM-MLM-2045-MC	L	PN 160	35	1.1/4"-11.5 NPT	25.6	40.5	51.0	46
NTM-MLM-2452-MC	L	PN 160	42	1.1/2"-11.5 NPT	26.0	42.0	53.0	55
NTM-MHM-0414-MC	S	PN 630	6	1/4"-18 NPT	15.0	28.0	35.0	17
NTM-MHM-0416-MC	S	PN 630	8	1/4"-18 NPT	15.0	28.0	35.0	17
NTM-MHM-0418-MC	S	PN 630	10	1/4"-18 NPT	15.0	27.5	35.0	19
NTM-MHM-0420-MC	S	PN 630	12	1/4"-18 NPT	15.0	29.0	36.5	22
NTM-MHM-0616-MC	S	PN 630	8	3/8"-18 NPT	15.3	28.0	35.0	19
NTM-MHM-0618-MC	S	PN 630	10	3/8"-18 NPT	15.3	27.5	35.0	19
NTM-MHM-0620-MC	S	PN 630	12	3/8"-18 NPT	15.3	29.5	37.0	22
NTM-MHM-0622-MC	S	PN 630	14	3/8"-18 NPT	15.3	31.5	39.5	24
NTM-MHM-0814-MC	S	PN 630	6	1/2"-14 NPT	20.0	35.0	42.0	24
NTM-MHM-0818-MC	S	PN 630	10	1/2"-14 NPT	20.0	34.5	42.0	24
NTM-MHM-0820-MC	S	PN 630	12	1/2"-14 NPT	20.0	34.5	42.0	24
NTM-MHM-0822-MC	S	PN 630	14	1/2"-14 NPT	20.0	36.0	44.0	24
NTM-MHM-0824-MC	S	PN 400	16	1/2"-14 NPT	20.0	35.5	44.0	27
NTM-MHM-0830-MC	S	PN 400	20	1/2"-14 NPT	20.0	37.5	48.0	32
NTM-MHM-1224-MC	S	PN 400	16	3/4"-14 NPT	20.2	37.5	46.0	32
NTM-MHM-1230-MC	S	PN 400	20	3/4"-14 NPT	20.2	37.5	48.0	32
NTM-MHM-1236-MC	S	PN 400	25	3/4"-14 NPT	20.2	40.0	52.0	41
NTM-MHM-1630-MC	S	PN 400	20	1"-11.5 NPT	25.0	44.5	55.0	41
NTM-MHM-1636-MC	S	PN 400	25	1"-11.5 NPT	25.0	45.0	57.0	41
NTM-MHM-1642-MC	S	PN 400	30	1"-11.5 NPT	25.0	46.0	59.5	46
NTM-MHM-2036-MC	S	PN 400	25	1.1/4"-11.5 NPT	25.6	46.0	58.0	46
NTM-MHM-2042-MC	S	PN 400	30	1.1/4"-11.5 NPT	25.6	46.5	60.0	46
NTM-MHM-2452-MC	S	PN 315	38	1.1/2"-11.5 NPT	26.0	49.0	65.0	55

Series: LL = Very Light L = Light S = Heavy PN = Nominal pressure PB = Max. operating pressure Ø d2 = External pipe diameter Product Version: Stainless Steel (SS)