

ORFS FEMALE / BSPP CAPTIVE MALE

Screw-in sockets

SURFACE MotusCoat™

MATERIAL Steel



Connection 1: BSP external thread, cylindrical

Sealing form 1: Shape E

Connection 2: ORFS nut threads


Sealing form 2: Flat seal

Design: Screw-in sockets

Construction: Straight

Material: Steel

Surface: MotusCoat™

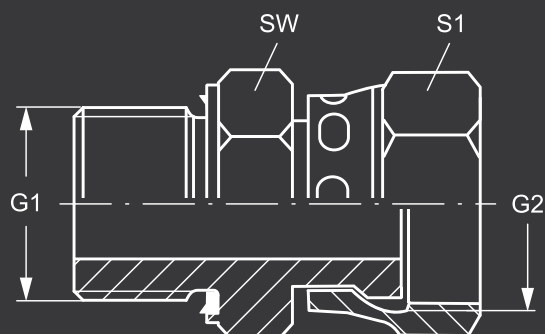

Identification	Working pressure bar	G1	G2	SW mm	S1
EDB-ORF-0209-MC	PN 500	G 1/8"-28	9/16"-18 UNF	14	17
EDB-ORF-0409-MC	PN 500	G 1/4"-19	9/16"-18 UNF	19	17
EDB-ORF-0411-MC	PN 630	G 1/4"-19	11/16"-16 UN	19	22
EDB-ORF-0413-MC	PN 630	G 1/4"-19	13/16"-16 UN	22	24
EDB-ORF-0611-MC	PN 630	G 3/8"-19	11/16"-16 UN	22	22
EDB-ORF-0613-MC	PN 630	G 3/8"-19	13/16"-16 UN	22	24
EDB-ORF-0811-MC	PN 420	G 1/2"-14	11/16"-16 UN	27	22
EDB-ORF-0813-MC	PN 420	G 1/2"-14	13/16"-16 UN	27	24
EDB-ORF-0816-MC	PN 400	G 1/2"-14	1"-14 UNS	27	30
EDB-ORF-0819-MC	PN 420	G 1/2"-14	1.3/16"-12 UN	30	36
EDB-ORF-1216-MC	PN 420	G 3/4"-14	1"-14 UNS	32	30
EDB-ORF-1219-MC	PN 400	G 3/4"-14	1.3/16"-12 UN	32	36
EDB-ORF-1623-MC	PN 400	G 1"-11	1.7/16"-12 UN	41	41
EDB-ORF-2027-MC	PN 250	G 1.1/4"-11	1.11/16"-12 UN	50	50
EDB-ORF-2432-MC	PN 250	G 1.1/2"-11	2"-12 UN	55	60

SW, S1, S2 = Width across flats

Spare Parts: WD Soft Seal for ED Fittings