


ORFS FEMALE / BSPF MALE

Connectors

SURFACE MotusCoat™

MATERIAL Steel

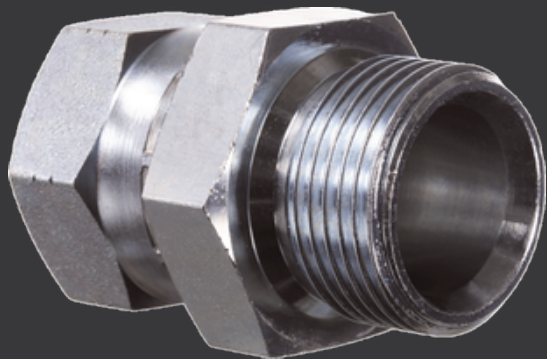

Connection 1: ORFS nut threads

Sealing form 1: Flat sealing

Connection 2: BSP cylindrical external threads


Sealing form 2: 60° inner cone

Design: Connectors

Construction: Straight

Material: Steel

Surface: MotusCoat™

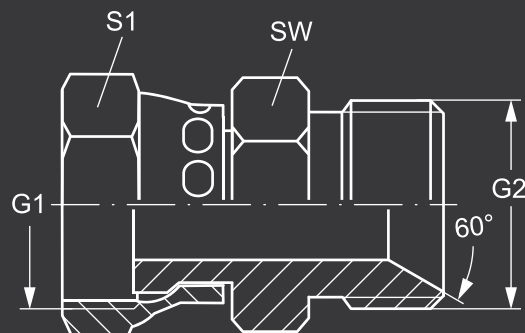

Identification	G1	G2	SW mm	S1
ORF-BPM-0904-MC	9/16"-18 UNF	G 1/4"-19	19	17
ORF-BPM-0906-MC	9/16"-18 UNF	G 3/8"-19	22	17
ORF-BPM-1104-MC	11/16"-16 UN	G 1/4"-19	19	22
ORF-BPM-1106-MC	11/16"-16 UN	G 3/8"-19	22	22
ORF-BPM-1108-MC	11/16"-16 UN	G 1/2"-14	27	22
ORF-BPM-1306-MC	13/16"-16 UN	G 3/8"-19	22	24
ORF-BPM-1308-MC	13/16"-16 UN	G 1/2"-14	27	24
ORF-BPM-1608-MC	1"-14 UNS	G 1/2"-14	27	30
ORF-BPM-1610-MC	1"-14 UNS	G 5/8"-14	30	30
ORF-BPM-1612-MC	1"-14 UNS	G 3/4"-14	32	30
ORF-BPM-1912-MC	1.3/16"-12 UN	G 3/4"-14	32	36
ORF-BPM-1916-MC	1.3/16"-12 UN	G 1"-11	41	36
ORF-BPM-2312-MC	1.7/16"-12 UN	G 3/4"-14	32	41
ORF-BPM-2316-MC	1.7/16"-12 UN	G 1"-11	41	41
ORF-BPM-2320-MC	1.7/16"-12 UN	G 1.1/4"-11	50	41
ORF-BPM-2720-MC	1.11/16"-12 UN	G 1.1/4"-11	50	50
ORF-BPM-3224-MC	2"-12 UN	G 1.1/2"-11	55	60

SW, S1, S2 = Width across flats