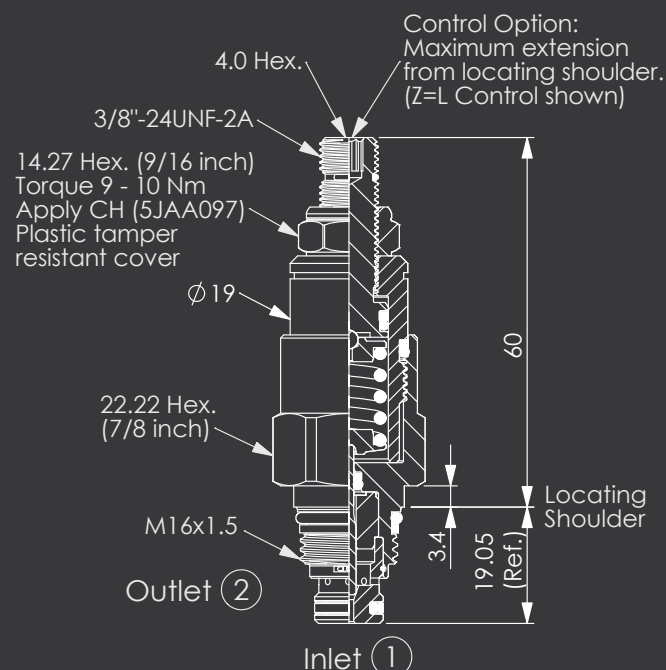



RELIEF VALVE

(Direct Acting, Pilot Stage)

Ordering Code: **RB-8A-X-Y-Z**

UNIT:mm

Illustrations / detail are
for reference only.
Data subject to change.

TECHNICAL DATA

Max. Operating pressure: 350 bar

Rated flow: 10 l/min

Cavity-Tooling: 8A-2

Installation torque: 27 - 33 Nm



Weight: 0.12 (Z=L) 0.14 (Z=KF) kg

OPERATION

20 ① to ② (P to T)

- Response Time-Typical (2 ms)
- Maximum Leakage Approximately (1 cc/min./70 bar)

OPTIONS

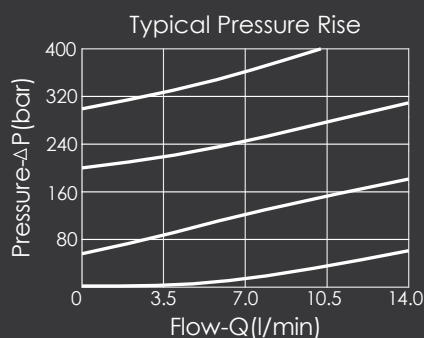L Leakproof hex. socket screw.**LP** Leakproof hex. socket screw. With stainless steel external metal components**K** Handknob with Lock Knob. (Order Code: 6ZAK001)**KF** Handknob with Panel Mount.**T** Three-winged Handknob Kit.**TP** Three-winged Handknob Kit. With stainless steel external metal components

PRESSURE SETTING

Y	
A	1.7 - 210 bar (70 bar Standard Setting)
B	1.7 - 105 bar (70 bar Standard Setting)
C	1.7 - 420 bar (70 bar Standard Setting)
D	1.7 - 55 bar (28 bar Standard Setting)
E	1.7 - 28 bar (14 bar Standard Setting)
W	1.7 - 315 bar (70 bar Standard Setting)