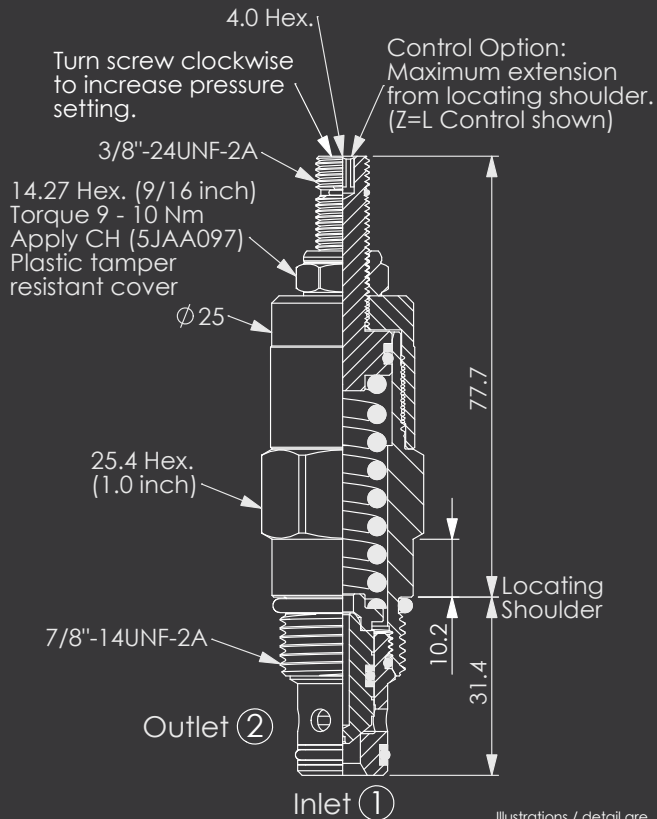
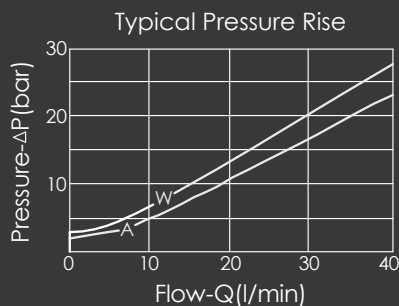


RELIEF VALVE


(Direct Acting, Poppet)

Ordering Code: **RD-10W-X-Y-Z**

UNIT:mm

Illustrations / detail are for reference only.
Data subject to change.

Y	PRESSURE SETTING	
A	17 - 210 bar (70 bar Standard Setting)	
W	17 - 250 bar (70 bar Standard Setting)	



TECHNICAL DATA

Max. Operating pressure:	250 bar
Rated flow:	40 l/min
Cavity-Tooling:	10W-2
Installation torque:	35 - 45 Nm
Weight:	0.23 kg
Will accept maximum pressure at port ② ; suitable for use in cross port relief circuits.	

X	OPERATION	
20	① to ② (P to T)	
- Response Time-Typical (2 ms) - Maximum Leakage Approximately (5 drops/min. to 85% of nominal setting) - Dirt tolerant		

Z	OPTIONS	
L	Leakproof hex. socket screw.	
C	Stainless Steel Tamper Resistant Cover.	
T	Three-winged Handknob Kit.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	