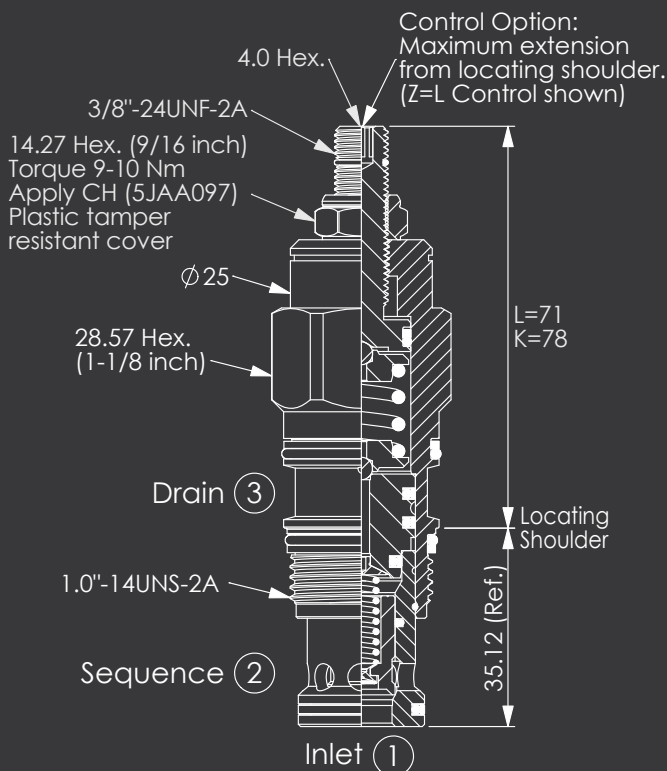
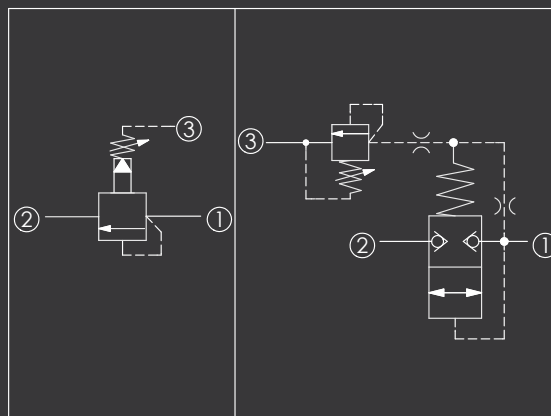


SEQUENCE VALVE

(Pilot Operated, Balanced Poppet)

Ordering Code: **SP-2A-X-Y-Z**

UNIT:mm

**TECHNICAL DATA**

Max. Operating pressure: 350 bar


Rated flow: 120 l/min

Cavity-Tooling: 2A-3

Installation torque: 60-70 Nm

Weight: 0.29 (Z=L) kg

Pressure Drop - full Sequence Open

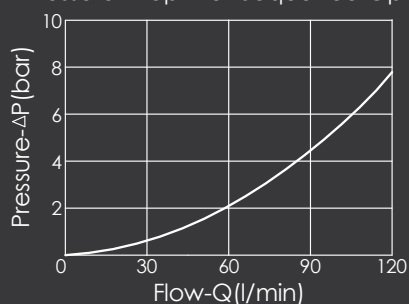**X****OPERATION****3G**

Balanced Poppet

- Dirt tolerant
- Maximum Leakage Approximately (0.7 cc/min./70 bar)
- If the pressure drop of relief valve is high, it easily occurs cavitation which cause noise and manifold erosion. In order to improve this situation, please select balanced poppet structure.

Y**SPRINGS**

ADJUSTMENT RANGES

A

7-210 bar (70 bar Standard Setting)

B

3.5-105 bar (70 bar Standard Setting)

C

10.5-420 bar (70 bar Standard Setting)

N

4-55 bar (14 bar Standard Setting)

Q

4-28 bar (14 bar Standard Setting)

W

10.5-315 bar (70 bar Standard Setting)

Z**OPTIONS****L**

Leakproof hex. socket screw.

**K**Handknob with Lock Knob.
(Order Code: 6ZAK001)**C**

Stainless Steel Tamper Resistant Cover.

