

SINGLE PIECE COUNTER FLANGE CODE 62 / BSP FEMALE

SAE screw-in counter flange, BSP


STANDARD SAE J 518 C, ISO 6162

SURFACE Black oiled

MATERIAL S355J2G3 (ST52.3)



Standard:	SAE J 518 C, ISO 6162
Construction:	Straight
Design:	SAE screw-in counter flange
Mounting:	Inner thread for metric screws
Included in scope of supply:	Flange only
Material:	S355J2G3 (ST52.3)
Surface:	Black oiled

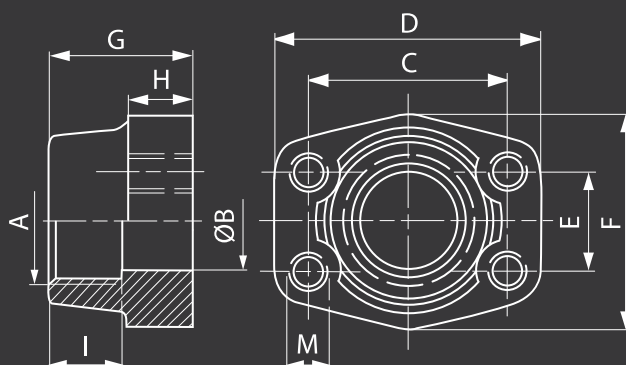

Note: The stated maximum working pressure relates to the flange. The actual working pressure is determined by the pipe (wall thickness) and the quality of the pipe.

Identification	Pressure series	PB 10.9 bar	Size	A	ØB mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	M metr.
SPF62-BPF-0806	6000 PSI	400	1/2"	G 3/8"-19	13	40.5	54	18.2	46	36	16	19	M 8
SPF62-BPF-0808	6000 PSI	400	1/2"	G 1/2"-14	13	40.5	54	18.2	46	36	16	19	M 8
SPF62-BPF-1208	6000 PSI	400	3/4"	G 1/2"-14	13	50.8	71	23.8	55	35	21	22	M 10
SPF62-BPF-1212	6000 PSI	400	3/4"	G 3/4"-14	19	50.8	71	23.8	55	35	21	22	M 10
SPF62-BPF-1612	6000 PSI	400	1"	G 3/4"-14	19	57.2	81	27.8	65	42	25	24	M 12
SPF62-BPF-1616	6000 PSI	400	1"	G 1"-11	25	57.2	81	27.8	65	42	25	24	M 12
SPF62-BPF-2016	6000 PSI	400	1.1/4"	G 1"-11	25	66.7	95	31.8	78	45	27	25	M 14
SPF62-BPF-2020	6000 PSI	400	1.1/4"	G 1.1/4"-11	32	66.7	95	31.8	78	45	27	25	M 14
SPF62-BPF-2420	6000 PSI	400	1.1/2"	G 1.1/4"-11	32	79.4	112	36.5	94	50	30	28	M 16
SPF62-BPF-2424	6000 PSI	400	1.1/2"	G 1.1/2"-11	38	79.4	112	36.5	94	50	30	28	M 16
SPF62-BPF-3224	6000 PSI	400	2"	G 1.1/2"-11	38	96.8	134	44.5	114	65	37	30	M 20
SPF62-BPF-3232	6000 PSI	400	2"	G 2"-11	51	96.8	134	44.5	114	65	37	30	M 20

PN = Nominal pressure PB = Max. operating pressure

Product Versions: GFS G U (3000 / 6000 PSI) - SAE screw-in counter flange, BSP, Flange only