
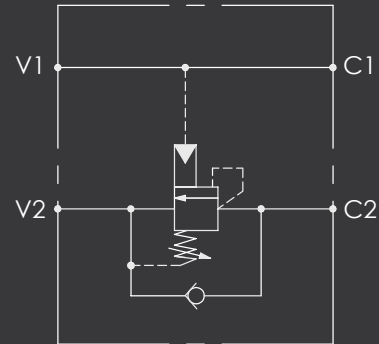


## STANDARD MANIFOLD, LINE MOUNT BODIES

Ordering Code: ☐ ☐ ☐

Stack Height : 32.0mm

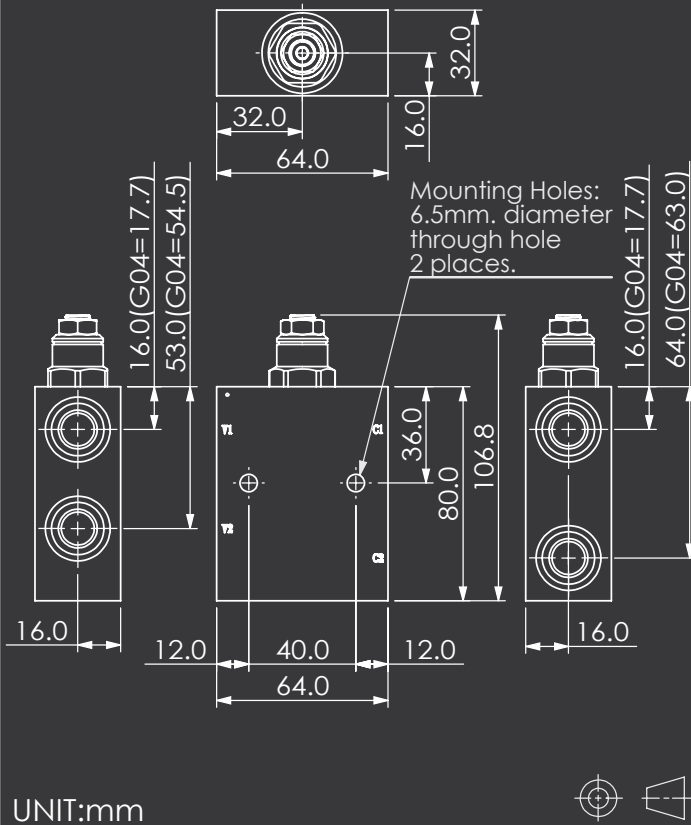

## TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Steel Body Pressure Rating: 350 bar

Rated flow: 60 l/min

Cartridge Valve:


Ref

☐ ☐ ☐

\* Refer to Motus Cartridge Valves Catalog.

|          |                         |
|----------|-------------------------|
| Aluminum | 0.35 kg(WITHOUT VALVES) |
|          | 0.55 kg(INCLUDE VALVES) |
| Steel    | 1.0 kg(WITHOUT VALVES)  |
|          | 1.2 kg(INCLUDE VALVES)  |

\* If you need the special specification. Please contact us.

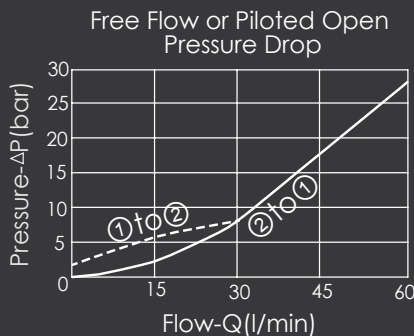

## PORT SIZE

| X   | PORTS  | PORTS  |  |
|-----|--------|--------|--|
|     | V1,V2  | C1,C2  |  |
| G02 | G 1/4" | G 1/4" |  |
| G03 | G 3/8" | G 3/8" |  |
| G04 | G 1/2" | G 1/2" |  |
| S06 | SAE 6  | SAE 6  |  |

Y

## BODY MATERIAL

A

HIGH-STRENGTH ALUMINUM

T

STEEL (black oxide)

Z

## CARTRIDGE VALVES SELECTION

WITHOUT VALVE

CB3H CB11A33HL (3:1,70-280bar)

CB4J CB11A34JL (4.5:1 , 350bar)

CB0J CB11A30JL (10:1 , 350bar)

Please refer to the list price of cartridge program.

Rev.221227