
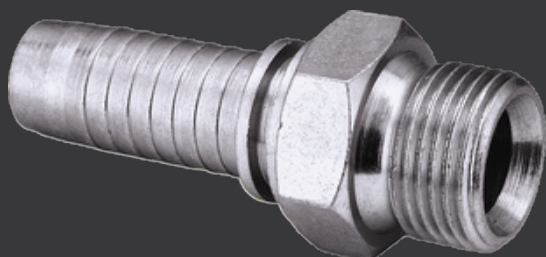


STB - BPM (SWAGE TAIL X BSP PARALLEL MALE)

Swage nipple, AGR

STANDARD ISO 8434-6, BS 5200**SURFACE** MotusCoat™**MATERIAL** Steel

Application:	Swage Nipples for MH100, MH200, MH400, MH700
Connection 1:	BSP external thread, cylindrical
Sealing form 1:	60° inner cone
Short code:	AGR
Standard:	ISO 8434-6, BS 5200
Material:	Steel
Surface:	MotusCoat™

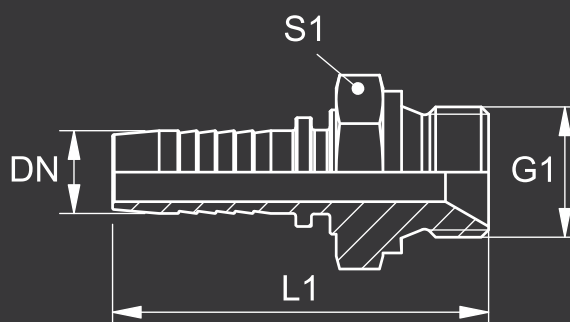

Note: Choose the appropriate ferrule based on the hose type.

Identification	DN	Size	Inches	G1	L1 mm	S1
STB-BPM-0302-MC	5	3	3/16"	G 1/8"-28	42.5	14
STB-BPM-0304-MC	5	3	3/16"	G 1/4"-19	46.0	19
STB-BPM-0402-MC	6	4	1/4"	G 1/8"-28	48.5	14
STB-BPM-0404-MC	6	4	1/4"	G 1/4"-19	52.0	19
STB-BPM-0406-MC	6	4	1/4"	G 3/8"-19	54.0	22
STB-BPM-0408-MC	6	4	1/4"	G 1/2"-14	57.5	27
STB-BPM-0504-MC	8	5	5/16"	G 1/4"-19	52.0	19
STB-BPM-0506-MC	8	5	5/16"	G 3/8"-19	54.0	22
STB-BPM-0508-MC	8	5	5/16"	G 1/2"-14	57.5	27
STB-BPM-0602-MC	10	6	3/8"	G 1/8"-28	50.0	17
STB-BPM-0604-MC	10	6	3/8"	G 1/4"-19	53.5	19
STB-BPM-0606-MC	10	6	3/8"	G 3/8"-19	55.5	22
STB-BPM-0608-MC	10	6	3/8"	G 1/2"-14	59.5	27
STB-BPM-0806-MC	12	8	1/2"	G 3/8"-19	56.5	22
STB-BPM-0808-MC	12	8	1/2"	G 1/2"-14	60.5	27
STB-BPM-0810-MC	12	8	1/2"	G 5/8"-14	62.5	30
STB-BPM-0812-MC	12	8	1/2"	G 3/4"-14	62.5	32
STB-BPM-1008-MC	16	10	5/8"	G 1/2"-14	65.0	27
STB-BPM-1010-MC	16	10	5/8"	G 5/8"-14	67.0	30
STB-BPM-1012-MC	16	10	5/8"	G 3/4"-14	67.0	32
STB-BPM-1212-MC	19	12	3/4"	G 3/4"-14	73.5	32
STB-BPM-1216-MC	19	12	3/4"	G 1"-11	78.5	41
STB-BPM-1616-MC	25	16	1"	G 1"-11	86.5	41
STB-BPM-1620-MC	25	16	1"	G 1.1/4"-11	87.5	50
STB-BPM-2020-MC	31	20	1.1/4"	G 1.1/4"-11	97.0	50
STB-BPM-2024-MC	31	20	1.1/4"	G 1.1/2"-11	100.0	55

STB - BPM (SWAGE TAIL X BSP PARALLEL MALE) (CONTINUED)

Swage nipple, AGR

Identification	DN	Size	Inches	G1	L1 mm	S1
STB-BPM-2420-MC	38	24	1.1/2"	G 1.1/4"-11	100.5	50
STB-BPM-2424-MC	38	24	1.1/2"	G 1.1/2"-11	103.5	55
STB-BPM-2432-MC	38	24	1.1/2"	G 2"-11	109.0	70
STB-BPM-3232-MC	51	32	2"	G 2"-11	124.5	70

Product Version: Stainless Steel (SS)