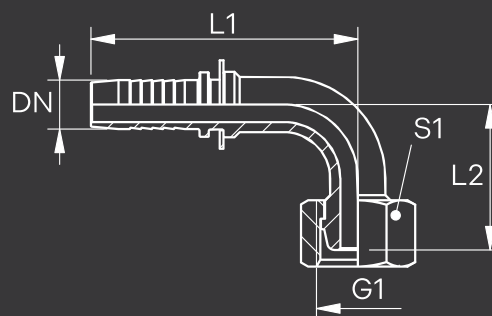


**STB - BSF****(Swage Tail x BSP Swivel Female) 90**

Swage nipple, DKR angle 90°

**STANDARD** ISO 8434-6, BS 5200**SURFACE** MotusCoat™**MATERIAL** Steel**Application:** Swage Nipples for MH100, MH200, MH400, MH700**Connection 1:** BSP nut thread**Sealing form 1:** 60° outer cone**S1 Short code:** DKR**Standard:** ISO 8434-6, BS 5200**Material:** Steel**Surface:** MotusCoat™

Note: Choose the appropriate ferrule based on the hose type.

| Identification      | DN | Size | Inches | G1          | L1 mm | L2 mm | S1 mm |
|---------------------|----|------|--------|-------------|-------|-------|-------|
| STB-BSF-90S-0302-MC | 5  | 3    | 3/16"  | G 1/8"-28   | 47.5  | 27.5  | 14    |
| STB-BSF-90S-0304-MC | 5  | 3    | 3/16"  | G 1/4"-19   | 49.0  | 27.0  | 19    |
| STB-BSF-90S-0402-MC | 6  | 4    | 1/4"   | G 1/8"-28   | 57.0  | 27.5  | 14    |
| STB-BSF-90S-0404-MC | 6  | 4    | 1/4"   | G 1/4"-19   | 55.0  | 27.0  | 19    |
| STB-BSF-90S-0406-MC | 6  | 4    | 1/4"   | G 3/8"-19   | 56.0  | 29.0  | 22    |
| STB-BSF-90S-0504-MC | 8  | 5    | 5/16"  | G 1/4"-19   | 55.0  | 31.0  | 17    |
| STB-BSF-90S-0506-MC | 8  | 5    | 5/16"  | G 3/8"-19   | 58.0  | 29.0  | 22    |
| STB-BSF-90S-0508-MC | 8  | 5    | 5/16"  | G 1/2"-14   | 62.5  | 34.0  | 27    |
| STB-BSF-90S-0604-MC | 10 | 6    | 3/8"   | G 1/4"-19   | 64.0  | 36.5  | 19    |
| STB-BSF-90S-0606-MC | 10 | 6    | 3/8"   | G 3/8"-19   | 64.0  | 33.0  | 22    |
| STB-BSF-90S-0608-MC | 10 | 6    | 3/8"   | G 1/2"-14   | 64.0  | 34.0  | 27    |
| STB-BSF-90S-0806-MC | 12 | 8    | 1/2"   | G 3/8"-19   | 72.5  | 40.0  | 22    |
| STB-BSF-90S-0808-MC | 12 | 8    | 1/2"   | G 1/2"-14   | 72.5  | 38.0  | 27    |
| STB-BSF-90S-0810-MC | 12 | 8    | 1/2"   | G 5/8"-14   | 71.5  | 42.5  | 30    |
| STB-BSF-90S-0812-MC | 12 | 8    | 1/2"   | G 3/4"-14   | 71.5  | 45.5  | 32    |
| STB-BSF-90S-1010-MC | 16 | 10   | 5/8"   | G 5/8"-14   | 87.0  | 52.5  | 30    |
| STB-BSF-90S-1012-MC | 16 | 10   | 5/8"   | G 3/4"-14   | 87.0  | 55.0  | 32    |
| STB-BSF-90S-1212-MC | 19 | 12   | 3/4"   | G 3/4"-14   | 99.0  | 58.0  | 32    |
| STB-BSF-90S-1216-MC | 19 | 12   | 3/4"   | G 1"-11     | 99.0  | 62.0  | 38    |
| STB-BSF-90S-1616-MC | 25 | 16   | 1"     | G 1"-11     | 126.0 | 74.0  | 38    |
| STB-BSF-90S-1620-MC | 25 | 16   | 1"     | G 1.1/4"-11 | 127.0 | 69.5  | 50    |
| STB-BSF-90S-2020-MC | 31 | 20   | 1.1/4" | G 1.1/4"-11 | 150.5 | 92.0  | 50    |

Product Version: Stainless Steel (SS)