


STB - F61 (SWAGE TAIL X CODE 61 FLANGE) 45

Swage nipple, SFL angle 45°

STANDARD SAE J518, ISO 6162-1**SURFACE** MotusCoat™**MATERIAL** Steel

Application:	Swage Nipples for MH100, MH200, MH400, MH700
Connection 1:	SAE flange connection 3000 PSI
Sealing form 1:	Flat seal with SF O-ring
Short code:	SFL
Standard:	SAE J518, ISO 6162-1
Material:	Steel
Surface:	MotusCoat™

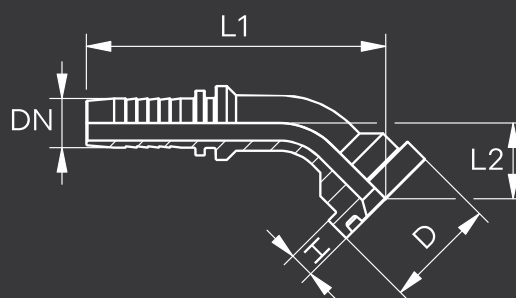

Note: Choose the appropriate ferrule based on the hose type.

Identification	DN	Size	Inches	Flange size	D mm	H mm	L1 mm	L2 mm
STB-F61-45S-0808-MC	12	8	1/2"	1/2"	30.2	6.80	81.0	21.0
STB-F61-45S-0812-MC	12	8	1/2"	3/4"	38.1	6.80	84.5	24.5
STB-F61-45S-1008-MC	16	10	5/8"	1/2"	30.2	6.80	100.0	26.5
STB-F61-45S-1012-MC	16	10	5/8"	3/4"	38.1	6.80	96.5	27.5
STB-F61-45S-1212-MC	19	12	3/4"	3/4"	38.1	6.80	107.5	28.0
STB-F61-45S-1216-MC	19	12	3/4"	1"	44.4	8.10	109.5	30.0
STB-F61-45S-1612-MC	25	16	1"	3/4"	38.1	6.70	128.0	30.0
STB-F61-45S-1616-MC	25	16	1"	1"	44.4	8.00	132.0	30.5
STB-F61-45S-1620-MC	25	16	1"	1.1/4"	50.8	8.10	134.0	32.0
STB-F61-45S-2016-MC	31	20	1.1/4"	1"	44.4	8.10	156.0	41.0
STB-F61-45S-2020-MC	31	20	1.1/4"	1.1/4"	50.8	8.10	156.0	36.0
STB-F61-45S-2024-MC	31	20	1.1/4"	1.1/2"	60.3	8.10	160.0	40.0
STB-F61-45S-2424-MC	38	24	1.1/2"	1.1/2"	60.3	8.10	184.0	46.0
STB-F61-45S-2432-MC	38	24	1.1/2"	2"	71.4	9.60	184.0	46.0
STB-F61-45S-3224-MC	51	32	2"	1.1/2"	60.3	8.10	182.0	42.0
STB-F61-45S-3232-MC	51	32	2"	2"	71.4	9.60	219.0	50.0

Product Version: Stainless Steel (SS)