


STB - F62 (SWAGE TAIL X CODE 62 FLANGE) 45

Swage nipple, SFS angle 45°

STANDARD SAE J518, ISO 6162-2**SURFACE** MotusCoat™**MATERIAL** Steel

Application:	Swage Nipples for MH100, MH200, MH400, MH700
Connection 1:	SAE flange connection 6000 PSI
Sealing form 1:	Flat seal with SF O-ring
Short code:	SFS
Standard:	SAE J518, ISO 6162-2
Material:	Steel
Surface:	MotusCoat™

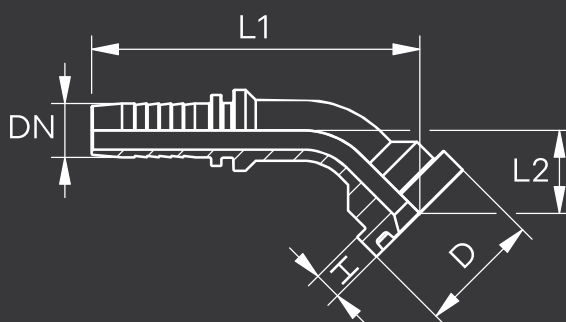

Note: Choose the appropriate ferrule based on the hose type.

Identification	DN	Size	Inches	Flange size	D mm	H mm	L1 mm	L2 mm
STB-F62-45S-0808-MC	12	8	1/2"	1/2"	31.8	7.8	82.0	22.0
STB-F62-45S-0812-MC	12	8	1/2"	3/4"	41.3	8.8	87.5	27.5
STB-F62-45S-1008-MC	16	10	5/8"	1/2"	31.8	7.8	105.0	29.0
STB-F62-45S-1012-MC	16	10	5/8"	3/4"	41.3	8.8	100.5	30.5
STB-F62-45S-1016-MC	16	10	5/8"	1"	47.6	9.6	123.0	33.0
STB-F62-45S-1212-MC	19	12	3/4"	3/4"	41.3	8.8	110.0	30.5
STB-F62-45S-1216-MC	19	12	3/4"	1"	47.6	9.6	114.5	35.0
STB-F62-45S-1612-MC	25	16	1"	3/4"	41.3	8.8	129.0	31.0
STB-F62-45S-1616-MC	25	16	1"	1"	47.6	9.6	137.0	35.5
STB-F62-45S-1620-MC	25	16	1"	1.1/4"	54.0	10.4	142.0	40.5
STB-F62-45S-2020-MC	31	20	1.1/4"	1.1/4"	54.0	10.4	164.0	44.0
STB-F62-45S-2024-MC	31	20	1.1/4"	1.1/2"	63.5	12.7	170.0	50.5
STB-F62-45S-2420-MC	38	24	1.1/2"	1.1/4"	54.0	10.4	168.5	44.0
STB-F62-45S-2424-MC	38	24	1.1/2"	1.1/2"	63.5	12.7	190.0	52.0
STB-F62-45S-2432-MC	38	24	1.1/2"	2"	79.4	12.7	201.0	63.5
STB-F62-45S-3232-MC	51	32	2"	2"	79.4	12.7	236.0	67.5

Product Version: Stainless Steel (SS)