


STB - F62 (SWAGE TAIL X CODE 62 FLANGE) 90

Swage nipple, SFS angle 90°

STANDARD SAE J518, ISO 6162-2**SURFACE** MotusCoat™**MATERIAL** Steel

Application:	Swage Nipples for MH100, MH200, MH400, MH700
Connection 1:	SAE flange connection 6000 PSI
Sealing form 1:	Flat seal with SF O-ring
Short code:	SFS
Standard:	SAE J518, ISO 6162-2
Material:	Steel
Surface:	MotusCoat™

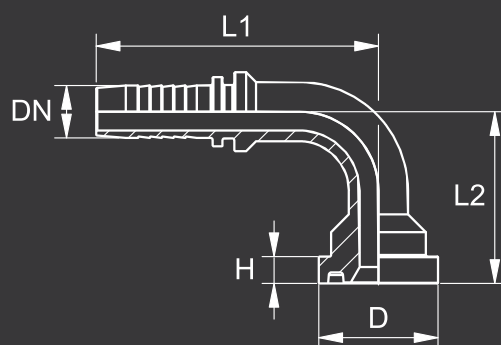

Note: Choose the appropriate ferrule based on the hose type.

Identification	DN	Size	Inches	Flange size	D mm	H mm	L1 mm	L2 mm
STB-F62-90S-0808-MC	12	8	1/2"	1/2"	31.8	7.8	71.5	44.5
STB-F62-90S-0812-MC	12	8	1/2"	3/4"	41.3	8.8	71.5	52.5
STB-F62-90S-1008-MC	16	10	5/8"	1/2"	31.8	7.8	91.0	60.0
STB-F62-90S-1012-MC	16	10	5/8"	3/4"	41.3	8.8	87.0	59.0
STB-F62-90S-1016-MC	16	10	5/8"	1"	47.6	9.6	106.0	72.0
STB-F62-90S-1208-MC	19	12	3/4"	1/2"	31.8	7.8	97.0	61.0
STB-F62-90S-1212-MC	19	12	3/4"	3/4"	41.3	8.8	99.0	61.0
STB-F62-90S-1216-MC	19	12	3/4"	1"	47.6	9.6	99.0	67.0
STB-F62-90S-1612-MC	25	16	1"	3/4"	41.3	8.8	115.0	67.0
STB-F62-90S-1616-MC	25	16	1"	1"	47.6	9.6	126.0	74.5
STB-F62-90S-1620-MC	25	16	1"	1.1/4"	54.0	10.4	126.0	81.5
STB-F62-90S-2016-MC	31	20	1.1/4"	1"	47.6	9.6	134.0	79.0
STB-F62-90S-2020 DL80-MC	31	20	1.1/4"	1.1/4"	54.0	10.4	150.5	80.0
STB-F62-90S-2020 DL90.5-MC	31	20	1.1/4"	1.1/4"	54.0	10.4	150.5	90.5
STB-F62-90S-2024-MC	31	20	1.1/4"	1.1/2"	63.5	12.7	150.5	99.0
STB-F62-90S-2420-MC	38	24	1.1/2"	1.1/4"	54.0	10.4	155.0	120.0
STB-F62-90S-2424-MC	38	24	1.1/2"	1.1/2"	63.5	12.7	175.5	108.5
STB-F62-90S-2432-MC	38	24	1.1/2"	2"	79.4	12.7	175.5	124.5
STB-F62-90S-3232-MC	51	32	2"	2"	79.4	12.7	219.5	140.0

Product Version: Stainless Steel (SS)