

STB - ORF

(Swage Tail x ORFS Swivel Female) 90

Swage nipple, ORFS angle 90°


STANDARD ISO 8434-3

SURFACE MotusCoat™

MATERIAL Steel



Application:	Swage Nipples for MH100, MH200, MH400, MH700
Connection 1:	UN / UNF nut threads
Sealing form 1:	Flat sealing
Short code:	ORFS
Standard:	ISO 8434-3
Material:	Steel
Surface:	MotusCoat™

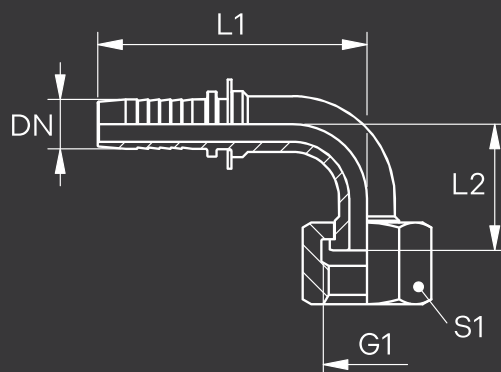

Note: Choose the appropriate ferrule based on the hose type.

Identification	DN	Size	Inches	G1	L1 mm	L2 mm	S1
STB-ORF-90S-0409-MC	6	4	1/4"	9/16"-18 UNF	55.0	26.5	17
STB-ORF-90S-0409 DL58-MC	6	4	1/4"	9/16"-18 UNF	55.0	58.0	17
STB-ORF-90S-0411-MC	6	4	1/4"	11/16"-16 UN	55.0	28.0	22
STB-ORF-90S-0511-MC	8	5	5/16"	11/16"-16 UN	58.0	28.0	22
STB-ORF-90S-0611-MC	10	6	3/8"	11/16"-16 UN	64.0	32.0	22
STB-ORF-90S-0611 DL69-MC	10	6	3/8"	11/16"-16 UN	64.0	69.0	22
STB-ORF-90S-0613-MC	10	6	3/8"	13/16"-16 UN	64.0	33.0	24
STB-ORF-90S-0813-MC	12	8	1/2"	13/16"-16 UN	72.5	37.0	24
STB-ORF-90S-0813 DL82-MC	12	8	1/2"	13/16"-16 UN	72.5	82.0	24
STB-ORF-90S-0816-MC	12	8	1/2"	1"-14 UNS	72.5	41.0	30
STB-ORF-90S-0819-MC	12	8	1/2"	1.3/16"-12 UN	71.5	43.5	36
STB-ORF-90S-1016-MC	16	10	5/8"	1"-14 UNS	88.0	47.5	30
STB-ORF-90S-1016 DL94-MC	16	10	5/8"	1"-14 UNS	88.0	94.0	30
STB-ORF-90S-1019-MC	16	10	5/8"	1.3/16"-12 UN	89.5	49.0	36
STB-ORF-90S-1212-MC	19	12	3/4"	1.3/16"-12 UN	99.5	52.0	36
STB-ORF-90S-1212 DL96-MC	19	12	3/4"	1.3/16"-12 UN	99.5	96.0	36
STB-ORF-90S-1223-MC	19	12	3/4"	1.7/16"-12 UN	98.5	56.0	41
STB-ORF-90S-1623-MC	25	16	1"	1.7/16"-12 UN	127.0	63.5	41
STB-ORF-90S-1623 DL114-MC	25	16	1"	1.7/16"-12 UN	127.0	114.0	41
STB-ORF-90S-2027-MC	31	20	1.1/4"	1.11/16"-12 UN	151.5	76.0	50
STB-ORF-90S-2027 DL129-MC	31	20	1.1/4"	1.11/16"-12 UN	151.5	129.0	50
STB-ORF-90S-2432-MC	38	24	1.1/2"	2"-12 UN	176.5	89.0	60
STB-ORF-90S-2432 DL146-MC	38	24	1.1/2"	2"-12 UN	176.5	146.0	60