
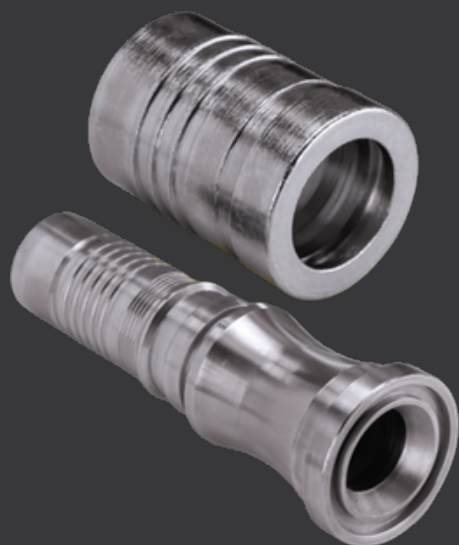


CODE 61 FLANGE

Swage fitting, SFL

STANDARD SAE J518, ISO 6162-1**SURFACE** MotusCoat™**MATERIAL** Steel

Application:	Swage fitting for MH800 hose
Connection 1:	SAE flange connection 3000 PSI
Sealing form 1:	Flat seal with SF O-ring
Short code:	SFL
Standard:	SAE J518, ISO 6162-1
Integration:	With pull-out protection (interlock)
Included in scope of supply:	Swage nipple + swage ferrule
Material:	Steel
Surface:	MotusCoat™

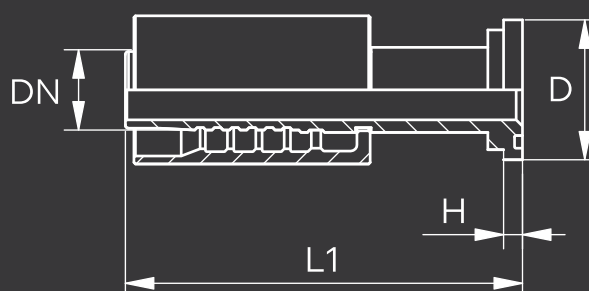

337

Identification	DN	Size	Inches	Flange sizes	D mm	H mm	L1 mm
STMI7-F61-0808-MC	12	8	1/2"	1/2"	30.2	6.7	90.4
STMI7-F61-0812-MC	12	8	1/2"	3/4"	38.1	6.7	91.6
STMI7-F61-1012-MC	16	10	3/8"	3/4"	38.1	6.7	102.6
STMI7-F61-1212-MC	19	12	3/4"	3/4"	38.1	6.8	116.5
STMI7-F61-1216-MC	19	12	3/4"	1"	44.5	8.1	119.5
STMI7-F61-1612-MC	25	16	1"	3/4"	38.1	6.8	132.0
STMI7-F61-1616-MC	25	16	1"	1"	44.5	8.1	135.5
STMI7-F61-1620-MC	25	16	1"	1.1/4"	50.8	8.1	138.5
STMI7-F61-2016-MC	31	20	1.1/4"	1"	44.5	8.0	145.0
STMI7-F61-2024-MC	31	20	1.1/4"	1.1/2"	60.3	8.0	129.0
STMI7-F61-2020-MC	31	20	1.1/4"	1.1/4"	50.8	8.0	144.5
STMI7-F61-2420-MC	38	24	1.1/2"	1.1/4"	50.8	8.1	158.0
STMI7-F61-2424-MC	38	24	1.1/2"	1.1/2"	60.3	8.1	166.5
STMI7-F61-2432-MC	38	24	1.1/2"	2"	71.4	9.6	169.5

Product Version: Stainless Steel (SS)