

JIC MALE / BSPP MALE POSITIONAL 90


Screw-in socket, angle 90°

SURFACE MotusCoat™

MATERIAL Steel



Connection 1:	BSP external thread, cylindrical
Sealing form 1:	Thread socket with O-ring + spacer diaphragm ring
Connection 2:	UN / UNF external threads
Sealing form 2:	74° outer cone
Design:	Adjustable direction screw-in socket
Construction:	Angle 90°
Material:	Steel
Surface:	MotusCoat™

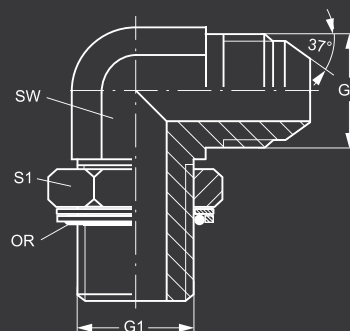

Identification	G1	G2	SW mm	S1	OR
BPP-JIM-90C-0204-MC	G 1/8"-28	7/16"-20 UNF	12	14	7.97 x 1.88
BPP-JIM-90C-0205-MC	G 1/8"-28	1/2"-20 UNF	14	14	7.97 x 1.88
BPP-JIM-90C-0404-MC	G 1/4"-19	7/16"-20 UNF	14	19	10.77 x 2.62
BPP-JIM-90C-0405-MC	G 1/4"-19	1/2"-20 UNF	14	19	10.77 x 2.62
BPP-JIM-90C-0405-MC	G 1/4"-19	9/16"-18 UNF	14	19	10.77 x 2.62
BPP-JIM-90C-0408-MC	G 1/4"-19	3/4"-16 UNF	19	19	10.77 x 2.62
BPP-JIM-90C-0604-MC	G 3/8"-19	7/16"-20 UNF	19	22	13.94 x 2.62
BPP-JIM-90C-0605-MC	G 3/8"-19	1/2"-20 UNF	19	22	13.94 x 2.62
BPP-JIM-90C-0606-MC	G 3/8"-19	9/16"-18 UNF	19	22	13.94 x 2.62
BPP-JIM-90C-0608-MC	G 3/8"-19	3/4"-16 UNF	19	22	13.94 x 2.62
BPP-JIM-90C-0610-MC	G 3/8"-19	7/8"-14 UNF	22	22	13.94 x 2.62
BPP-JIM-90C-0804-MC	G 1/2"-14	7/16"-20 UNF	19	27	17.86 x 2.62
BPP-JIM-90C-0806-MC	G 1/2"-14	9/16"-18 UNF	22	27	17.86 x 2.62
BPP-JIM-90C-0808-MC	G 1/2"-14	3/4"-16 UNF	22	27	17.86 x 2.62
BPP-JIM-90C-0810-MC	G 1/2"-14	7/8"-14 UNF	22	27	17.86 x 2.62
BPP-JIM-90C-0812-MC	G 1/2"-14	1.1/16"-12 UN	27	27	17.86 x 2.62
BPP-JIM-90C-1010-MC	G 5/8"-14	7/8"-14 UNF	22	30	19.70 x 2.62
BPP-JIM-90C-1208-MC	G 3/4"-14	3/4"-16 UNF	27	36	23.47 x 2.62
BPP-JIM-90C-1210-MC	G 3/4"-14	7/8"-14 UNF	27	36	23.47 x 2.62
BPP-JIM-90C-1212-MC	G 3/4"-14	1.1/16"-12 UN	27	36	23.47 x 2.62
BPP-JIM-90C-1214-MC	G 3/4"-14	1.3/16"-12 UN	33	36	23.47 x 2.62
BPP-JIM-90C-1216-MC	G 3/4"-14	1.5/16"-12 UN	33	36	23.47 x 2.62
BPP-JIM-90C-1612-MC	G 1"-11	1.1/16"-12 UN	33	41	29.74 x 3.53
BPP-JIM-90C-1616-MC	G 1"-11	1.5/16"-12 UN	33	41	29.74 x 3.53
BPP-JIM-90C-1620-MC	G 1"-11	1.5/8"-12 UN	41	41	29.74 x 3.53
BPP-JIM-90C-2016-MC	G 1.1/4"-11	1.5/16"-12 UN	41	50	37.69 x 3.53
BPP-JIM-90C-2020-MC	G 1.1/4"-11	1.5/8"-12 UN	41	50	37.69 x 3.53
BPP-JIM-90C-2024-MC	G 1.1/4"-11	1.7/8"-12 UN	48	50	37.69 x 3.53
BPP-JIM-90C-2424-MC	G 1.1/2"-11	1.7/8"-12 UN	48	55	44.04 x 3.53

JIC MALE / BSPP MALE POSITIONAL 90 (CONTINUED)

Screw-in socket, angle 90°

SW, S1, S2 = Width across flats Product Version: Stainless Steel (SS)