


JIC SWIVEL FEMALE / BSPP CAPTIVE MALE

Screw-in sockets

SURFACE MotusCoat™

MATERIAL Steel

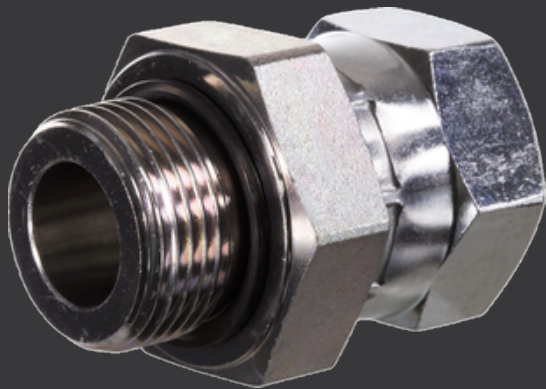

Connection 1: BSP external thread, cylindrical

Sealing form 1: Shape E

Connection 2: UN / UNF external threads


Sealing form 2: 74° outer cone

Design: Screw-in sockets

Construction: Straight

Material: Steel

Surface: MotusCoat™

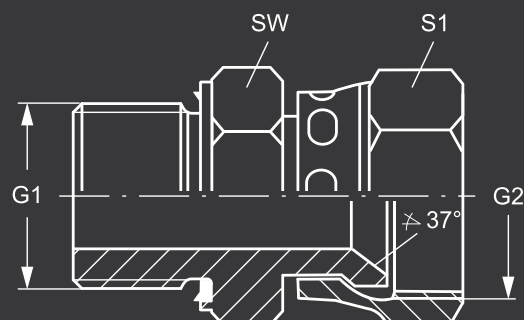

Identification	G1	G2	SW	S1
EDB-JIF-0204-MC	G 1/8"-28	7/16"-20 UNF	14	14
EDB-JIF-0205-MC	G 1/8"-28	1/2"-20 UNF	14	17
EDB-JIF-0405-MC	G 1/4"-19	1/2"-20 UNF	19	17
EDB-JIF-0406-MC	G 1/4"-19	9/16"-18 UNF	19	19
EDB-JIF-0408-MC	G 1/4"-19	3/4"-16 UNF	19	22
EDB-JIF-0606-MC	G 3/8"-19	9/16"-18 UNF	22	19
EDB-JIF-0608-MC	G 3/8"-19	3/4"-16 UNF	22	22
EDB-JIF-0610-MC	G 3/8"-19	7/8"-14 UNF	27	27
EDB-JIF-0808-MC	G 1/2"-14	7/8"-14 UNF	27	27
EDB-JIF-0812-MC	G 1/2"-14	1.1/16"-12 UN	27	32
EDB-JIF-1212-MC	G 3/4"-14	1.1/16"-12 UN	32	32
EDB-JIF-1216-MC	G 3/4"-14	1.5/16"-12 UN	32	41
EDB-JIF-1616-MC	G 1"-11	1.5/16"-12 UN	41	41
EDB-JIF-1620-MC	G 1"-11	1.5/8"-12 UN	41	50
EDB-JIF-2020-MC	G 1.1/4"-11	1.5/8"-12 UN	50	50
EDB-JIF-2024-MC	G 1.1/4"-11	1.7/8"-12 UN	50	60
EDB-JIF-2424-MC	G 1.1/2"-11	1.7/8"-12 UN	55	60

SW, S1, S2 = Width across flats Product Version: Stainless Steel (SS) Spare Parts: WD Soft Seal for ED Fittings