

JIC SWIVEL FEMALE / BSPP MALE (CAPTIVE SEAL)

Connectors

MATERIAL Steel



Connection 1: UN / UNF nut threads

Sealing form 1: 74° inner cone


Connection 2: BSP cylindrical external threads

Sealing form 2: 60° inner cone + shape E

Design: Connectors

Construction: Straight

Material: Steel

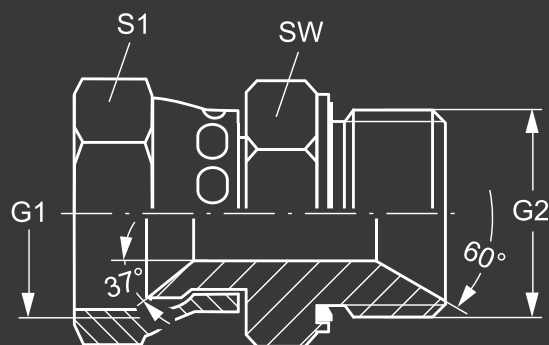

Identification	G1	G2	SW mm	S1
JIF-EDB-0402-MC	7/16"-20 UNF	G 1/8"-28	14	17
JIF-EDB-0404-MC	7/16"-20 UNF	G 1/4"-19	19	17
JIF-EDB-0504-MC	1/2"-20 UNF	G 1/4"-19	19	17
JIF-EDB-0604-MC	9/16"-18 UNF	G 1/4"-19	19	19
JIF-EDB-0606-MC	9/16"-18 UNF	G 3/8"-19	22	19
JIF-EDB-0806-MC	3/4"-16 UNF	G 3/8"-19	32	24
JIF-EDB-0808-MC	3/4"-16 UNF	G 1/2"-14	27	24
JIF-EDB-1008-MC	7/8"-14 UNF	G 1/2"-14	27	27
JIF-EDB-1212-MC	1.1/16"-12 UN	G 3/4"-14	32	32
JIF-EDB-1216-MC	1.1/16"-12 UN	G 1"-11	41	32
JIF-EDB-1612-MC	1.5/16"-12 UN	G 3/4"-14	32	41
JIF-EDB-1616-MC	1.5/16"-12 UN	G 1"-11	41	41
JIF-EDB-2016-MC	1.5/8"-12 UN	G 1"-11	41	50
JIF-EDB-2020-MC	1.5/8"-12 UN	G 1.1/4"-11	50	50
JIF-EDB-2420-MC	1.7/8"-12 UN	G 1.1/4"-11	50	55
JIF-EDB-2424-MC	1.7/8"-12 UN	G 1.1/2"-11	55	55

SW, S1, S2 = Width across flats