


METRIC MALE UNION (G)

Fitting


STANDARD ISO 8434-1

SURFACE MotusCoat™

MATERIAL Steel

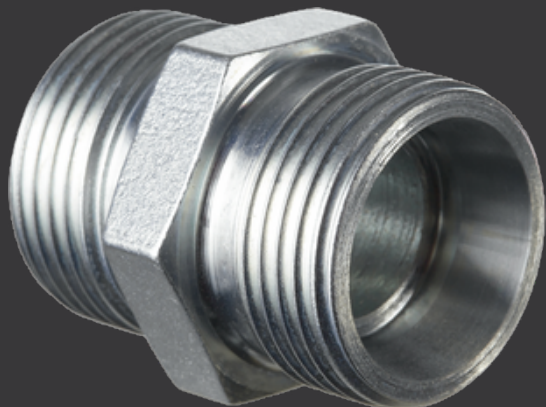

Connection 1:	Metric cylindrical outer thread
Sealing form 1:	24° inner cone
Connection 2:	Metric cylindrical outer thread
Sealing form 2:	24° inner cone
Design:	Fitting
Construction:	Straight
Standard:	ISO 8434-1
Included in scope of supply:	Socket (without union nut and cutting ring)
Material:	Steel
Surface:	MotusCoat™



Identification	Series	Working pressure bar	Ø d1 mm	Ø d2 mm	L1 mm	L2 mm	SW mm
MLLM-MLLM-0808-MC	LL	PN 100	4	4	20	12.0	9
MLLM-MLLM-1008-MC	LL	PN 100	6	4	20	10.5	11
MLLM-MLLM-1010-MC	LL	PN 100	6	6	20	9.0	11
MLLM-MLLM-1208-MC	LL	PN 100	8	4	22	12.5	12
MLLM-MLLM-1210-MC	LL	PN 100	8	6	22	11.0	12
MLLM-MLLM-1212-MC	LL	PN 100	8	8	23	12.0	12
MLLM-MLLM-1414-MC	LL	PN 100	10	10	23	12.0	14
MLLM-MLLM-1616-MC	LL	PN 100	12	12	23	11.0	17
MLM-MLM-1212-MC	L	PN 315	6	6	24	10.0	12
MLM-MLM-1412-MC	L	PN 315	8	6	25	11.0	14
MLM-MLM-1414-MC	L	PN 315	8	8	25	11.0	14
MLM-MLM-1612-MC	L	PN 315	10	6	26	12.0	17
MLM-MLM-1614-MC	L	PN 315	10	8	26	12.0	17
MLM-MLM-1616-MC	L	PN 315	10	10	27	13.0	17
MLM-MLM-1812-MC	L	PN 315	12	6	27	13.0	19
MLM-MLM-1814-MC	L	PN 315	12	8	27	13.0	19
MLM-MLM-1816-MC	L	PN 315	12	10	28	14.0	19
MLM-MLM-1818-MC	L	PN 315	12	12	28	14.0	19
MLM-MLM-2212-MC	L	PN 315	15	6	28	14.0	24
MLM-MLM-2214-MC	L	PN 315	15	8	28	14.0	24
MLM-MLM-2216-MC	L	PN 315	15	10	29	15.0	24
MLM-MLM-2218-MC	L	PN 315	15	12	29	15.0	24
MLM-MLM-2222-MC	L	PN 315	15	15	30	16.0	24
MLM-MLM-2612-MC	L	PN 315	18	6	29	14.5	27
MLM-MLM-2614-MC	L	PN 315	18	8	29	14.5	27
MLM-MLM-2616-MC	L	PN 315	18	10	30	15.5	27
MLM-MLM-2618-MC	L	PN 315	18	12	30	15.5	27

METRIC MALE UNION (G) (CONTINUED)

Fitting

Identification	Series	Working pressure bar	Ø d1 mm	Ø d2 mm	L1 mm	L2 mm	SW mm
MLM-MLM-2622-MC	L	PN 315	18	15	31	16.5	27
MLM-MLM-2626-MC	L	PN 315	18	18	31	16.0	27
MLM-MLM-3014-MC	L	PN 160	22	8	31	16.5	32
MLM-MLM-3016-MC	L	PN 160	22	10	32	17.5	32
MLM-MLM-3018-MC	L	PN 160	22	12	32	17.5	32
MLM-MLM-3022-MC	L	PN 160	22	15	33	18.5	32
MLM-MLM-3026-MC	L	PN 160	22	18	33	18.0	32
MLM-MLM-3030-MC	L	PN 160	22	22	35	20.0	32
MLM-MLM-3614-MC	L	PN 160	28	8	33	18.5	41
MLM-MLM-3616-MC	L	PN 160	28	10	34	19.5	41
MLM-MLM-3618-MC	L	PN 160	28	12	34	19.5	41
MLM-MLM-3622-MC	L	PN 160	28	15	35	20.5	41
MLM-MLM-3626-MC	L	PN 160	28	18	35	20.0	41
MLM-MLM-3630-MC	L	PN 160	28	22	37	22.0	41
MLM-MLM-3636-MC	L	PN 160	28	28	36	21.0	41
MLM-MLM-4530-MC	L	PN 160	35	22	39	21.0	46
MLM-MLM-4536-MC	L	PN 160	35	28	39	21.0	46
MLM-MLM-4545-MC	L	PN 160	35	35	41	20.0	46
MLM-MLM-5236-MC	L	PN 160	42	28	41	22.5	55
MLM-MLM-5245-MC	L	PN 160	42	35	43	21.5	55
MLM-MLM-5252-MC	L	PN 160	42	42	66	21.0	55
MLM-MHM-1618-MC	L / S	PN 315	18	16	33	17.0	27
MHM-MHM-1414-MC	S	PN 630	6	6	30	16.0	14
MHM-MHM-1614-MC	S	PN 630	8	6	32	18.0	17
MHM-MHM-1616-MC	S	PN 630	8	8	32	18.0	17
MHM-MHM-1814-MC	S	PN 630	10	6	32	17.5	19
MHM-MHM-1816-MC	S	PN 630	10	8	32	17.5	19
MHM-MHM-1818-MC	S	PN 630	10	10	32	17.0	19
MHM-MHM-2012-MC	S	PN 630	12	6	34	19.5	22
MHM-MHM-2014-MC	S	PN 630	12	8	34	19.5	22
MHM-MHM-2016-MC	S	PN 630	12	10	34	19.0	22
MHM-MHM-2020-MC	S	PN 630	12	12	34	19.0	22
MHM-MHM-2212-MC	S	PN 630	14	6	36	21.0	24
MHM-MHM-2214-MC	S	PN 630	14	8	36	21.0	24
MHM-MHM-2216-MC	S	PN 630	14	10	36	20.5	24
MHM-MHM-2220-MC	S	PN 630	14	12	36	20.5	24
MHM-MHM-2222-MC	S	PN 630	14	14	38	22.0	24
MHM-MHM-2412-MC	S	PN 400	16	6	36	20.5	27
MHM-MHM-2414-MC	S	PN 400	16	8	36	20.5	27
MHM-MHM-2416-MC	S	PN 400	16	10	36	20.0	27
MHM-MHM-2420-MC	S	PN 400	16	12	36	20.0	27
MHM-MHM-2422-MC	S	PN 400	16	14	38	21.5	27
MHM-MHM-2424-MC	S	PN 400	16	16	38	21.0	27

METRIC MALE UNION (G) (CONTINUED)

Fitting

Identification	Series	Working pressure bar	Ø d1 mm	Ø d2 mm	L1 mm	L2 mm	SW mm
MHM-MHM-3016-MC	S	PN 400	20	10	40	22.0	32
MHM-MHM-3020-MC	S	PN 400	20	12	40	22.0	32
MHM-MHM-3022-MC	S	PN 400	20	14	42	23.5	32
MHM-MHM-3024-MC	S	PN 400	20	16	42	23.0	32
MHM-MHM-3030-MC	S	PN 400	20	20	44	23.0	32
MHM-MHM-3624-MC	S	PN 400	25	16	46	25.5	41
MHM-MHM-3630-MC	S	PN 400	25	20	48	25.5	41
MHM-MHM-3636-MC	S	PN 400	25	25	50	26.0	41
MHM-MHM-4224-MC	S	PN 400	30	16	48	26.0	46
MHM-MHM-4230-MC	S	PN 400	30	20	50	26.0	46
MHM-MHM-4236-MC	S	PN 400	30	25	52	26.5	46
MHM-MHM-4242-MC	S	PN 400	30	30	54	27.0	46
MHM-MHM-5224-MC	S	PN 315	38	16	53	28.5	55
MHM-MHM-5236-MC	S	PN 315	38	25	57	29.0	55
MHM-MHM-5242-MC	S	PN 315	38	30	59	29.5	55
MHM-MHM-5252-MC	S	PN 315	38	38	61	29.0	55
MHM-MLM-2422-MC	S / L	PN 400	16	15	36	20.5	27
MHM-MLM-3022-MC	S / L	PN 400	20	15	40	22.5	32
MHM-MLM-3026-MC	S / L	PN 400	20	18	40	22.0	32
MHM-MLM-3630-MC	S / L	PN 400	25	22	46	26.5	41

Series: LL = Very Light L = Light S = Heavy PN = Nominal pressure PB = Max. operating pressure Ø d2 = External pipe diameter

Product Version: Stainless Steel (SS)