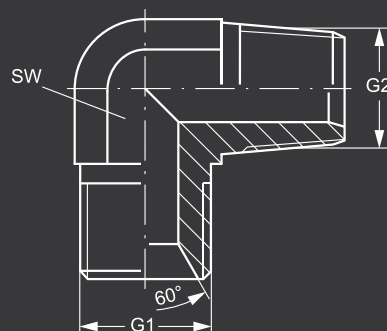


BSP MALE / NPT MALE 90

Screw-in socket, angle 90°

SURFACE MotusCoat™**MATERIAL** Steel**Connection 1:** BSP external thread, cylindrical**Sealing form 1:** 60° inner cone**Connection 2:** NPT external threads**Sealing form 2:** Thread seal**Design:** Screw-in sockets**Construction:** Angle 90°**Material:** Steel**Surface:** MotusCoat™

Identification	G1	G2	SW mm
BPM-NTM-90C-0202-MC	G 1/8"-28	1/8"-27 NPT	11
BPM-NTM-90C-0402-MC	G 1/4"-19	1/8"-27 NPT	14
BPM-NTM-90C-0404-MC	G 1/4"-19	1/4"-18 NPT	14
BPM-NTM-90C-0604-MC	G 3/8"-19	1/4"-18 NPT	19
BPM-NTM-90C-0606-MC	G 3/8"-19	3/8"-18 NPT	19
BPM-NTM-90C-0608-MC	G 3/8"-19	1/2"-14 NPT	22
BPM-NTM-90C-0806-MC	G 1/2"-14	3/8"-18 NPT	22
BPM-NTM-90C-0808-MC	G 1/2"-14	1/2"-14 NPT	22
BPM-NTM-90C-1208-MC	G 3/4"-14	1/2"-14 NPT	27
BPM-NTM-90C-1212-MC	G 3/4"-14	3/4"-14 NPT	27
BPM-NTM-90C-1616-MC	G 1"-11	1"-11.5 NPT	33
BPM-NTM-90C-2020-MC	G 1.1/4"-11	1.1/4"-11.5 NPT	41
BPM-NTM-90C-2424-MC	G 1.1/2"-11	1.1/2"-11.5 NPT	50
BPM-NTM-90C-3232-MC	G 2"-11	2"-11.5 NPT	55

SW = Width across flats