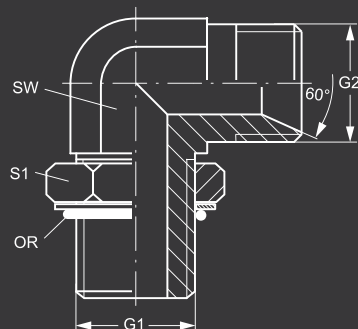


BSP MALE / UNO MALE POSITIONAL 90

Screw-in socket, AGR, angle 90°

SURFACE MotusCoat™**MATERIAL** Steel**Connection 1:** UN / UNF external threads**Sealing form 1:** O-ring seal on screw-in socket**Connection 2:** BSP cylindrical external threads**Sealing form 2:** 60° inner cone**Design:** Screw-in sockets**Construction:** Angle 90°**Material:** Steel**Surface:** MotusCoat™

Identification	G1	G2	SW mm	S1	OR
UNP-BPM-90C-0402-MC	7/16"-20 UNF	G 1/8"-28	11	17	8.92 x 1.83
UNP-BPM-90C-0404-MC	7/16"-20 UNF	G 1/4"-19	11	17	8.92 x 1.83
UNP-BPM-90C-0406-MC	7/16"-20 UNF	G 3/8"-19	14	17	8.92 x 1.83
UNP-BPM-90C-0502-MC	1/2"-20 UNF	G 1/8"-28	14	19	10.52 x 1.83
UNP-BPM-90C-0504-MC	1/2"-20 UNF	G 1/4"-19	14	19	10.52 x 1.83
UNP-BPM-90C-0604-MC	9/16"-18 UNF	G 1/4"-19	14	21	11.90 x 1.98
UNP-BPM-90C-0606-MC	9/16"-18 UNF	G 3/8"-19	14	21	11.90 x 1.98
UNP-BPM-90C-0804-MC	3/4"-16 UNF	G 1/4"-19	19	25	16.36 x 2.20
UNP-BPM-90C-0806-MC	3/4"-16 UNF	G 3/8"-19	19	25	16.36 x 2.20
UNP-BPM-90C-0808-MC	3/4"-16 UNF	G 1/2"-14	19	25	16.36 x 2.20
UNP-BPM-90C-0812-MC	3/4"-16 UNF	G 3/4"-14	22	25	16.36 x 2.20
UNP-BPM-90C-1006-MC	7/8"-14 UNF	G 3/8"-19	22	30	19.18 x 2.46
UNP-BPM-90C-1008-MC	7/8"-14 UNF	G 1/2"-14	22	30	19.18 x 2.46
UNP-BPM-90C-1010-MC	7/8"-14 UNF	G 5/8"-14	22	30	19.18 x 2.46
UNP-BPM-90C-1012-MC	7/8"-14 UNF	G 3/4"-14	22	30	19.18 x 2.46
UNP-BPM-90C-1208-MC	1.1/16"-12 UN	G 1/2"-14	27	36	23.47 x 2.95
UNP-BPM-90C-1212-MC	1.1/16"-12 UN	G 3/4"-14	27	36	23.47 x 2.95
UNP-BPM-90C-1216-MC	1.1/16"-12 UN	G 1"-11	33	36	23.47 x 2.95
UNP-BPM-90C-1612-MC	1.5/16"-12 UN	G 3/4"-14	33	45	29.74 x 2.95
UNP-BPM-90C-1616-MC	1.5/16"-12 UN	G 1"-11	33	45	29.74 x 2.95
UNP-BPM-90C-1620-MC	1.5/16"-12 UN	G 1.1/4"-11	41	45	29.74 x 2.95
UNP-BPM-90C-2016-MC	1.5/8"-12 UN	G 1"-11	41	55	37.47 x 3.00
UNP-BPM-90C-2020-MC	1.5/8"-12 UN	G 1.1/4"-11	41	55	37.47 x 3.00

SW, S1, S2 = Width across flats