


CODE 62 FLANGE 90

Swage fitting, SFS angle 90°

STANDARD SAE J518, ISO 6162-2**SURFACE** MotusCoat™**MATERIAL** Steel

Application:	Swage fitting for MH800 hose
Connection 1:	SAE flange connection 6000 PSI
Sealing form 1:	Flat seal with SF O-ring
Short code:	SFS
Standard:	SAE J518, ISO 6162-2
Integration:	With pull-out protection (interlock)
Included in scope of supply:	Swage nipple + swage ferrule
Material:	Steel
Surface:	MotusCoat™

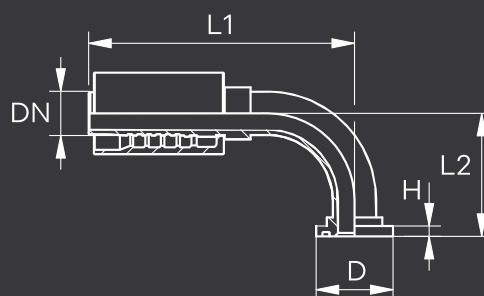

343

Identification	DN	Size	Inches	Flange sizes	D mm	H mm	L1 mm	L2 mm
STMI7-F62-90S-0808-MC	12	8	1/2"	1/2"	31.8	7.7	86.0	46.0
STMI7-F62-90S-0812-MC	12	8	1/2"	3/4"	41.3	8.8	92.5	46.0
STMI7-F62-90S-1008-MC	16	10	5/8"	1/2"	31.8	7.7	108.0	48.0
STMI7-F62-90S-1012-MC	16	10	5/8"	3/4"	41.3	8.8	107.5	52.5
STMI7-F62-90S-1016-MC	16	10	5/8"	1"	47.6	9.5	108.0	57.0
STMI7-F62-90S-1208-MC L80	19	12	3/4"	1/2"	31.8	7.8	117.0	80.0
STMI7-F62-90S-1208-MC L100	19	12	3/4"	1/2"	31.8	7.8	117.0	100.0
STMI7-F62-90S-1212-MC	19	12	3/4"	3/4"	41.3	8.8	127.5	62.0
STMI7-F62-90S-1212-MC L52	19	12	3/4"	3/4"	41.3	8.8	127.5	52.0
STMI7-F62-90S-1212-MC L80	19	12	3/4"	3/4"	41.3	8.8	127.5	80.0
STMI7-F62-90S-1212-MC L85	19	12	3/4"	3/4"	41.3	8.8	127.5	85.0
STMI7-F62-90S-1212-MC L100	19	12	3/4"	3/4"	41.3	8.8	127.5	100.0
STMI7-F62-90S-1212-MC L150	19	12	3/4"	3/4"	41.3	8.8	127.5	150.0
STMI7-F62-90S-1216-MC	19	12	3/4"	1"	47.6	9.6	127.5	68.0
STMI7-F62-90S-1612-MC	25	16	1"	3/4"	41.3	8.8	152.5	70.5
STMI7-F62-90S-1616-MC	25	16	1"	1"	47.6	9.6	158.0	74.0
STMI7-F62-90S-1616-MC L100	25	16	1"	1"	47.6	9.6	158.0	100.0
STMI7-F62-90S-1616-MC L200	25	16	1"	1"	47.6	9.6	158.0	200.0
STMI7-F62-90S-1620-MC	25	16	1"	1.1/4"	54.0	10.4	156.0	83.5
STMI7-F62-90S-2016-MC	31	20	1.1/4"	1"	47.6	9.5	162.0	80.0
STMI7-F62-90S-2020-MC	31	20	1.1/4"	1.1/4"	54.0	10.3	173.5	94.5
STMI7-F62-90S-2020-MC L120	31	20	1.1/4"	1.1/4"	54.0	10.3	173.5	120.0
STMI7-F62-90S-2024-MC	31	20	1.1/4"	1.1/2"	63.5	12.6	174.5	100.0
STMI7-F62-90S-2420-MC	38	24	1.1/2"	1.1/4"	54.0	10.3	193.0	100.0
STMI7-F62-90S-2424-MC	38	24	1.1/2"	1.1/2"	63.5	12.6	213.5	110.0
STMI7-F62-90S-2432-MC	38	24	1.1/2"	2"	79.4	12.6	215.5	126.0
STMI7-F62-90S-3232-MC	51	32	2"	2"	79.4	12.6	268.0	138.0

Product Version: Stainless Steel (SS)